

# DASH-IF implementation guidelines: the DASH timing model

Commit Snapshot, 3 December 2019

**This version:**

<https://dashif-documents.azurewebsites.net/Guidelines-TimingModel/master/Guidelines-TimingModel.html>

**Issue Tracking:**

[GitHub](#)

[Inline In Spec](#)

**Editors:**

DASH Industry Forum

---

## Table of Contents

<b>1</b>	<b>Purpose</b>
<b>2</b>	<b>Interpretation</b>
<b>3</b>	<b>Disclaimer</b>
<b>4</b>	<b>DASH and related standards</b>
4.1	Relationship to the previous versions of this document
4.2	Structure of a DASH presentation
<b>5</b>	<b>Timing model</b>
5.1	Conformance requirements
5.2	MPD Timeline
5.3	Periods
5.4	Representations
5.5	Sample timeline
5.6	Clock drift is forbidden
5.7	Media segments
5.7.1	Media segment duration deviation
5.7.2	Segments must be aligned
5.8	Period connectivity
5.8.1	Period continuity
5.9	Dynamic MPDs
5.9.1	Real time clock synchronization
5.9.2	Availability
5.9.3	Time shift buffer
5.9.4	Presentation delay
5.9.5	MPD updates
5.9.5.1	Adding content to the MPD
5.9.5.2	Removing content from the MPD

- 5.9.5.3 End of live content
- 5.9.6 MPD refreshes
  - 5.9.6.1 Conditional MPD downloads
- 5.10 Timing of stand-alone IMSC1 and WebVTT text files
- 5.11 Forbidden techniques
- 5.12 Examples
  - 5.12.1 Offer content with imperfectly aligned tracks
  - 5.12.2 Split a period
  - 5.12.3 Change the default\_KID
- 5.13 Segment addressing modes
  - 5.13.1 Indexed addressing
    - 5.13.2 Structure of the index segment
      - 5.13.2.1 Moving the period start point (indexed addressing)
    - 5.13.3 Explicit addressing
      - 5.13.3.1 Moving the period start point (explicit addressing)
    - 5.13.4 Simple addressing
      - 5.13.4.1 Inaccuracy in media segment timing when using simple addressing
      - 5.13.4.2 Moving the period start point (simple addressing)
      - 5.13.4.3 Converting simple addressing to explicit addressing
- 5.14 Large timescales and time values
- 5.15 Representing durations in XML

## 6 Externally defined terms

### Conformance

### Index

Terms defined by this specification

### References

Normative References

Informative References

### Issues Index

## 1. Purpose§

The scope of the DASH-IF InterOperability Points (**IOPs**) defined in this document is to provide support interoperable services for high-quality video distribution based on MPEG-DASH and related standards. The specified features enable relevant use cases including on-demand and live services, ad insertion, content protection and subtitling. The integration of different media codecs into DASH-based distribution is also defined.

The guidelines are provided in order to address DASH-IF members' needs and industry best practices. The guidelines provide support the implementation of conforming service offerings as well as the DASH client implementation. While alternative interpretations may be equally valid in terms of standards conformance, services and clients created following the guidelines defined in this document can be expected to exhibit highly interoperable behavior between different implementations.

## 2. Interpretation§

Requirements in this document describe required service and client behaviors that DASH-IF considers interoperable:

1. If a service provider follows these requirements in a published DASH service, that service is likely to experience successful playback on a wide variety of clients and exhibit graceful degradation when a client does not support all features used by the service.
2. If a client implementer follows the client-oriented requirements described in this document, the client plays the content conforming to this document.

This document uses statements of fact when describing normative requirements defined in referenced specifications such as [MPEGDASH] and [MPEGCMAF]. [RFC2119] statements (e.g. "SHALL", "SHOULD" and "MAY") are used when this document defines a new requirement or further constrains a requirement from a referenced document. In order to clearly separate the requirements of referenced specifications vs. the additional requirements set by this document, the normative statements in each section of this document are separated into two different groups, ones starting with "(referenced specification) requires/recommends:" and the ones starting with "This document requires/recommends:". See also [Conformance](#).

All DASH presentations are assumed to be conforming to an [IOP](#). A service may explicitly signal itself as conforming by including the string <https://dashif.org/guidelines/> in MPD@profiles.

There is no strict backward compatibility with previous versions - best practices change over time and what was once considered sensible may be replaced by a superior approach later on. Therefore, clients and services that were conforming to version N of this document are not guaranteed to conform to version N+1.

### 3. Disclaimer§

This is a document made available by DASH-IF. The technology embodied in this document may involve the use of intellectual property rights, including patents and patent applications owned or controlled by any of the authors or developers of this document. No patent license, either implied or express, is granted to you by this document. DASH-IF has made no search or investigation for such rights and DASH-IF disclaims any duty to do so. The rights and obligations which apply to DASH-IF documents, as such rights and obligations are set forth and defined in the DASH-IF Bylaws and IPR Policy including, but not limited to, patent and other intellectual property license rights and obligations. A copy of the DASH-IF Bylaws and IPR Policy can be obtained at <http://dashif.org/>.

The material contained herein is provided on an "AS IS" basis and to the maximum extent permitted by applicable law, this material is provided AS IS, and the authors and developers of this material and DASH-IF hereby disclaim all other warranties and conditions, either express, implied or statutory, including, but not limited to, any (if any) implied warranties, duties or conditions of merchantability, of fitness for a particular purpose, of accuracy or completeness of responses, of workmanlike effort, and of lack of negligence.

In addition, this document may include references to documents and/or technologies controlled by third parties. Those third party documents and technologies may be subject to third party rules and licensing terms. No intellectual property license, either implied or express, to any third party material is granted to you by this document or DASH-IF. DASH-IF makes no any warranty whatsoever for such third party material.

Note that technologies included in this document and for which no test and conformance material is provided, are only published as a candidate technologies, and may be removed if no test material is provided before releasing a new version of this guidelines document. For the availability of test material, please check <http://www.dashif.org>.


### 4. DASH and related standards§

DASH is a set of manifest and media formats for adaptive media delivery defined by [MPEGDASH]. Dynamic Adaptive Streaming over HTTP (DASH) is initially defined in the first edition of ISO/IEC 23009-1 which was published in April 2012 and some corrections were done in 2013. In May 2014, ISO/IEC published the second version of ISO/IEC 23009-1 that includes additional features and provide additional clarifications. ISO/IEC published the third and fourth editions of ISO/IEC 23009-1 in 2019 and 2020.

ISO/IEC also published the 1st and 2nd edition of ISO/IEC 23000-19 'Common media application format (CMAF) for segmented media' [MPEGCMAF] in 2018 and 2019. CMAF defines segment and chunk format based on ISO Base Media File Format, optimized for streaming delivery. CMAF defines a set of well defined constraints that allows interoperability for media deliverable objects, which are compatible with [MPEGDASH].

This document is based on the 4th edition DASH [MPEGDASH] and 2nd edition CMAF [MPEGCMAF] specifications.

DASH together with related standards and specifications is the foundation for an ecosystem of services and clients that work together to enable audio/video/text and related content to be presented to end-users.

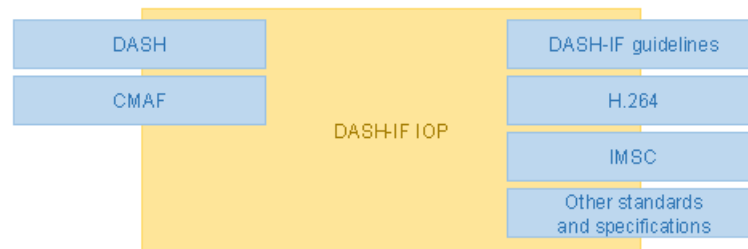

**Figure 1** This document connects DASH with international standards, industry specifications and DASH-IF guidelines.

[MPEGDASH] defines a highly flexible set of building blocks that needs to be constrained to a meaningful subset to ensure interoperable behavior in common scenarios. This document defines constraints that limit DASH features to those that are considered appropriate for use in interoperable clients and services.

This document was generated in close coordination with [DVB-DASH]. The features are aligned to the extent considered reasonable. The tools and features are aligned to the extent considered reasonable. In addition, DASH-IF worked closely with ATSC to develop a DASH profile for ATSC3.0 for broadcast distribution [ATSC3].

Clients consuming DASH content will need to interact with the host device's media platform. While few constraints are defined on these interactions, this document does assume that the media platform implements APIs that are equivalent to the popular Media Source Extensions (MSE) and Encrypted Media Extensions (EME).

#### 4.1. Relationship to the previous versions of this document§

There is no strict backward compatibility with previous versions of this document - best practices change over time and what was once considered sensible may be replaced by a superior approach later on. Therefore, clients and services that were conforming to version N of this document are not guaranteed to conform to version N+1.


The initial two versions of this document were based on the first edition of ISO/IEC 23009-1. Version 4.3 was mostly relying on the third edition of ISO/IEC 23009-1.

This version of the document relies on the 4th edition of ISO/IEC 23009-1 that was technically frozen in July 2019 and is expected to be published by the end of 2019 as ISO/IEC 23009-1:2020.

#### 4.2. Structure of a DASH presentation§

[MPEGDASH] specifies the structure of a DASH presentation, which consists primarily of:

1. The manifest or **MPD**, which describes the content and how it can be accessed.
2. Data containers that clients will download over the course of a presentation in order to obtain media samples.

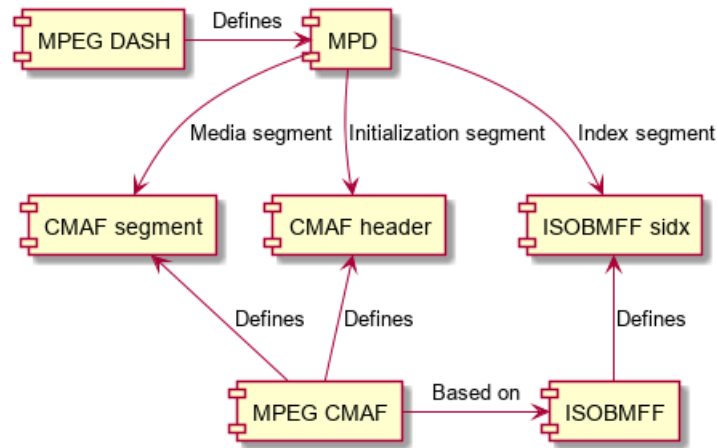

**Figure 2** Relationships of primary DASH data structure and the standards they are defined in.

The MPD is an XML file that follows a schema defined by [\[MPEGDASH\]](#). This schema defines various extension mechanisms for 3rd parties. This document defines some extensions, as do other industry specifications.

[\[MPEGDASH\]](#) defines two data container formats, one based on [\[ISOBMFF\]](#) and the other [\[MPEG2TS\]](#). However, only the former is used in modern solutions. This document only supports services using the [\[ISOBMFF\]](#) container format.

[\[MPEGCMAF\]](#) is the constrained media format based on [\[ISOBMFF\]](#), specifically designed for adaptive streaming. This document uses [\[MPEGCMAF\]](#) compatible data containers.

Note: The relationship to [\[MPEGCMAF\]](#) is constrained to the container format. In particular, there is no requirement to conform to [\[MPEGCMAF\]](#) media profiles.

The data container format defines the physical structure of the following elements described by the MPD:

1. Each [representation](#) in the [MPD](#) references an [initialization segment](#).
2. Each [representation](#) in the [MPD](#) references any number of [media segments](#).
3. Some [representations](#) in the [MPD](#) may reference an [index segment](#), depending on the [addressing mode](#) used.

Note: HLS (RFC8216) also support ([\[MPEGCMAF\]](#)). Therefore, under certain constraints, the content encoded in ([\[MPEGCMAF\]](#)) can be delivered using MPD or HLS m3u8 manifest format.

<a href="#">[MPEGDASH]</a>	<a href="#">[MPEGCMAF]</a>	<a href="#">[ISOBMFF]</a>
(media) segment, subsegment	CMAF segment	
initialization segment	CMAF header	
index segment, segment index		segment index box ( <i>sidx</i> )

**Figure 3** Quick reference of closely related terms in different standards.

Note: [\[MPEGDASH\]](#) has the concept of "segment" (URL-addressable media object) and "subsegment" (byte range of URL-addressable media object), whereas [\[MPEGCMAF\]](#) does not make such a distinction. This document uses [\[MPEGCMAF\]](#) segment terminology, with the term segment in this document being equivalent to "CMAF segment" which in turns means "DASH media segment or media subsegment", depending the employed DASH profile.

## 5. Timing model§

The purpose of this chapter is to give a holistic overview of DASH presentation timing and related segment addressing. It is not intended to provide details of the timing model and all possible uses of the attributes in [\[MPEGDASH\]](#).

In order to achieve higher interoperability, DASH-IF's Implementation Guidelines allow considerably limited options than the ones provided by [\[MPEGDASH\]](#), constraining services to a specific set of reasonably flexible behaviors that are highly interoperable with modern client platforms. This chapter covers the timing model and related segment addressing schemes for these common use-cases.

### 5.1. Conformance requirements§

This document adds additional constraints to [\[MPEGDASH\]](#) timing requirements.

To be conformant to this document:

- Content generated by a service offering SHALL be compliant to
  - [\[MPEGDASH\]](#) and [\[MPEGDASHCMAFPFILE\]](#).
  - Additional constraints in following sections
- Clients SHALL be compliant to the constraints in the following sections.

### 5.2. MPD Timeline§

[\[MPEGDASH\]](#) defines DASH general timing model in its clause 4.3.

The [MPD](#) defines the **MPD timeline** of a **Media Presentation**, which serves as the baseline for all scheduling decisions made during DASH presentation playback.

There exist two types of Media Presentations, indicated by the `MPD@type`.

The playback of a **static MPD** (defined in [\[MPEGDASH\]](#) as a MPD with `MPD@type="static"`) does not depend on the mapping of the MPD timeline to real time. This means that entire presentation is available at any time and a client can play any part of the presentation at any time (e.g. it can start playback at any time and seek freely within the entire presentation).

The [MPD timeline](#) of a **dynamic MPD** (defined in [\[MPEGDASH\]](#) as a MPD with `MPD@type="dynamic"`) has a fixed mapping to wall clock time, with each point on the [MPD timeline](#) corresponding to a point in real time. This means that segments of the presentation become available over time. Clients can introduce an additional offset with respect to wall clock time for the purpose of maintaining an input buffer to cope with network bandwidth fluctuations.


Note: In addition to mapping the [MPD timeline](#) to wall clock time, [a dynamic MPD can be updated during the presentation](#). Updates may add new [periods](#) and remove or modify existing ones including adding new segments with progress in time, though some restrictions apply. See [§ 5.9.5 MPD updates](#).

The time zero on the [MPD timeline](#) of a [dynamic MPD](#) is mapped to the point in wall clock time indicated by `MPD@availabilityStartTime`.

The ultimate purpose of the [MPD](#) is to enable the client to obtain media samples for playback. Additionally a DASH client can dynamically switch between different bitrates of the same content to adapt to the network bandwidth fluctuation. The following data structures are most relevant to locating and scheduling the samples:

1. The [MPD](#) consists of consecutive [periods](#) which map data onto the [MPD timeline](#).


- Each [period](#) contains one or more [representations](#), each of which provides media samples inside a sequence of [media segments](#).
- [Representations](#) within a [period](#) are grouped in [adaptation sets](#), which associate related [representations](#) and decorate them with metadata.

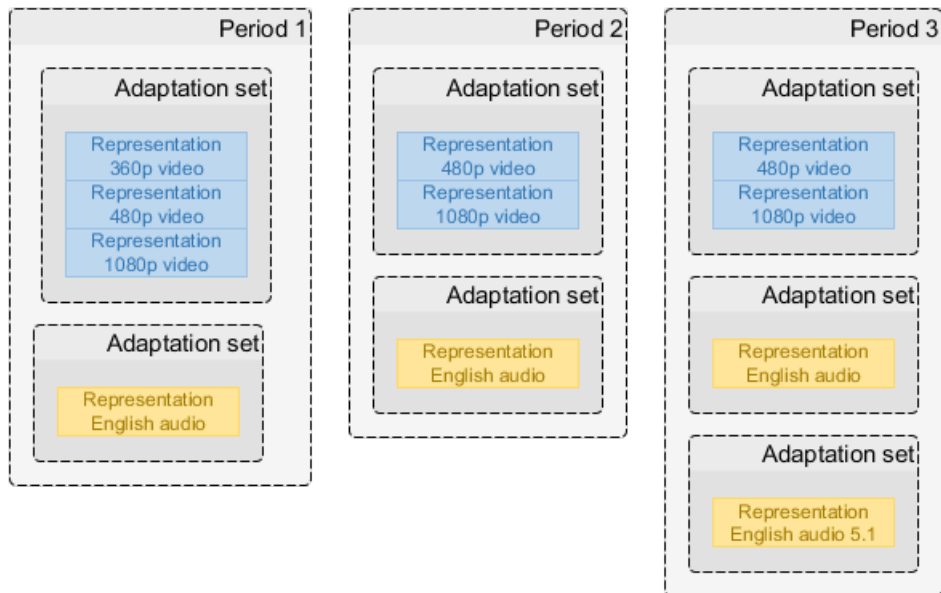

**Figure 4** The primary elements described by an [MPD](#).

### 5.3. Periods

An [MPD](#) defines an ordered list of one or more consecutive **periods**. A [period](#) is both a time span on the [MPD timeline](#) and a definition of the data to be presented during this time span. [Period](#) timing is relative to the zero point of the [MPD timeline](#).



**Figure 5** An [MPD](#) is a collection of consecutive periods.

Common reasons for defining multiple [periods](#) are:

- Assembling a presentation from multiple self-contained pieces of content.
- Inserting ads in the middle of existing content and/or replacing spans of existing content with ads.
- Adding/removing certain [representations](#) as the nature of the content changes (e.g. a new title starts with a different set of offered languages).
- Updating period-scoped metadata (e.g. codec configuration or DRM signaling).

[Periods](#) are self-contained - a client is not required to know the contents of another [period](#) in order to correctly present a [period](#). Knowledge of the contents of different periods may be used by a client to achieve seamless [period](#) transitions, especially when working with [period-connected representations](#).

## EXAMPLE 1

The below [static MPD](#) consists of two 20-second [periods](#). The duration of the first [period](#) is calculated using the start point of the second [period](#). The total duration of the presentation is 40 seconds.

```
<MPD xmlns="urn:mpeg:dash:schema:mpd:2011" type="static">
  <Period>
    ...
  </Period>
  <Period start="PT20S" duration="PT20S">
    ...
  </Period>
</MPD>
```

Parts of the [MPD](#) structure that are not relevant for this chapter have been omitted - this is not a fully functional [MPD](#) file.

[MPEGDASH] clause 5.3.2 defines the period's requirements in MPD authoring. Among others it requires the followings:

1. All periods are consecutive and non-overlapping. A [period](#) may have a duration of zero.

Note: A [period](#) with a duration of zero might, for example, be the result of ad-insertion logic deciding not to insert any ad.

2. In a [static MPD](#), the first [period](#) starts at the time zero of the [MPD timeline](#). In a [dynamic MPD](#), the first [period](#) starts at or after the zero point of the [MPD timeline](#).
3. In a [static MPD](#), either the last [period](#) has a `Period@duration` or `MPD@mediaPresentationDuration` exists.
4. In a [dynamic MPD](#), the last [period](#) may have a `Period@duration`, in which case it has a fixed duration. If without `Period@duration`, the last [period](#) in a [dynamic MPD](#) has an unknown duration, which allows to extend the timeline indefinitely.

Note: In a [dynamic MPD](#), a [period](#) with an unknown duration may be converted to fixed-duration by an MPD update. Periods in a [dynamic MPD](#) can also be shortened or removed entirely under certain conditions. However, [Media Presentation](#) is defined until (current wall clock time + `MPD@minimumUpdatePeriod`), by which the current MPD is still valid. See § 5.9.5 [MPD updates](#).

5. `MPD@mediaPresentationDuration` may be present. If present, it accurately matches the duration between the time zero on the [MPD timeline](#) and the end of the last period. Clients SHALL calculate the total duration of a [static MPD](#) by adding up the durations of each [period](#) and SHALL NOT rely on the presence of `MPD@mediaPresentationDuration`.

Note: This calculation is necessary because the durations of XLink periods can only be known after the XLink is resolved. Therefore it is impossible to always determine the total [MPD](#) duration on the service side as only the client is guaranteed to have access to all the required knowledge.

## 5.4. Representations§

A **representation** is a sequence of **segments** as defined by [MPEGDASH] 5.3.1 and 5.3.5. A `Representation` element is a collection of these **segment references** and a description of the samples within the referenced [media segments](#).

In practice, each representation usually belongs to exactly one [adaptation set](#) and often belongs to exactly one [period](#), although a [representation may be connected with a representation in another period](#).



Each [segment](#) reference addresses a [media segment](#) that corresponds to a specific time span on the [sample timeline](#). Each [media segment](#) contains samples for a specific time span on the [sample timeline](#).

Note: [Simple addressing](#) allows the actual time span of samples within a [media segment](#) to deviate from the corresponding time span described in the [MPD \(\[MPEGDASH\] 7.2.1\)](#). All timing-related clauses in this document refer to the timing described in the [MPD](#) (i.e. according to [MPD timeline](#)) unless otherwise noted.

The exact mechanism used to define segment references depends on the [addressing mode](#) used by the representation.

This document requires the following additional requirement:


- All [representations](#) in the same [adaptation set](#) SHALL use the same [addressing mode](#).

As recommended by [\[MPEGDASH\] 7.2.1](#):

- There should not be gaps or overlapping [media segments](#) in a [representation](#).


This document additionally requires:

- In a [static MPD](#) a [representation](#) SHALL contain enough [segment references](#) to cover the entire time span of the [period](#).

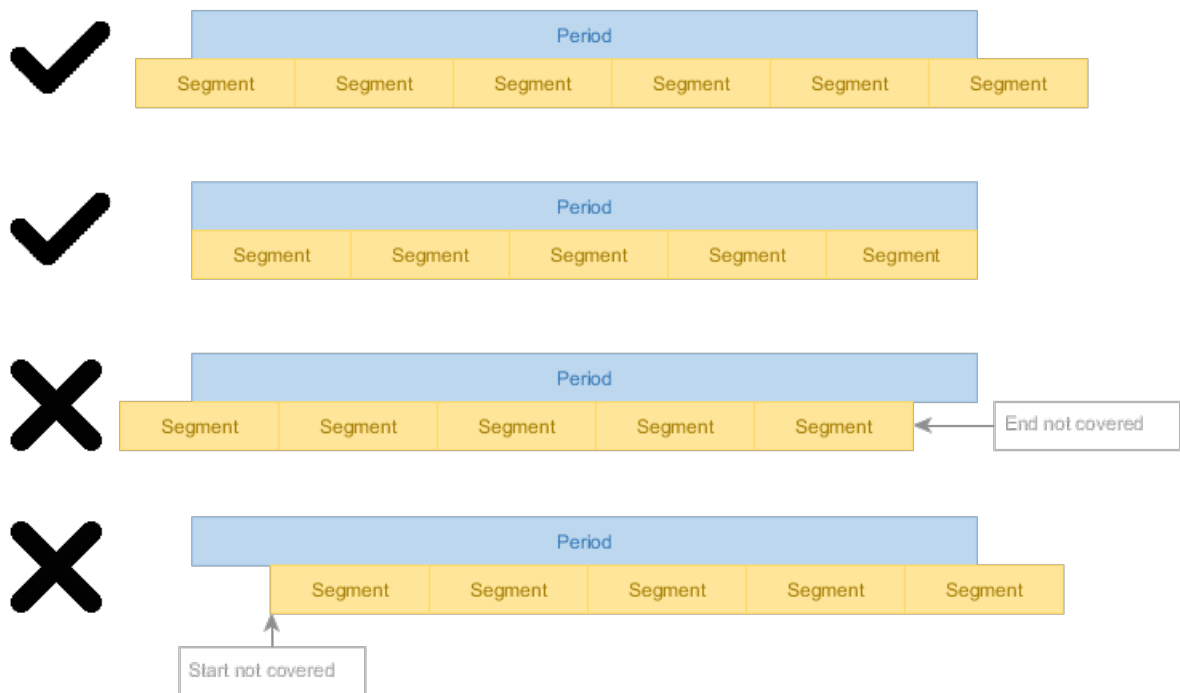

**Figure 6** In a [static MPD](#), the entire [period](#) must be covered with [media segments](#).

- In a [dynamic MPD](#), a [representation](#) element SHALL contain enough [segment references](#) to cover the time span of the [period](#) that intersects with the [time shift buffer](#). However, gaps in this time span are allowed.

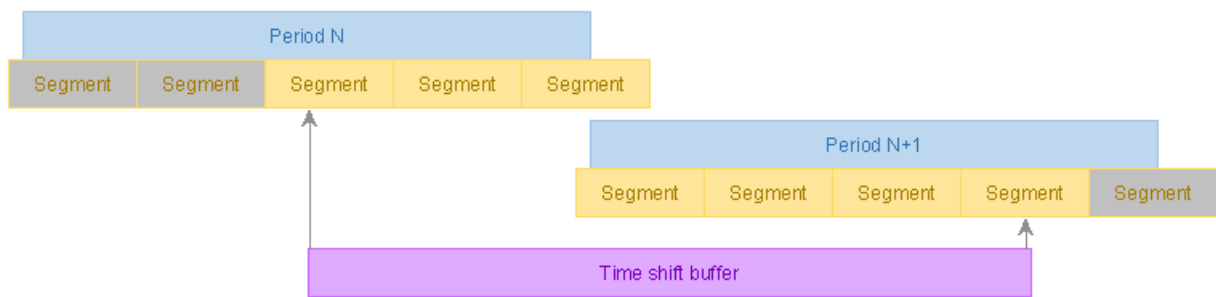

**Figure 7** In a *dynamic MPD*, the *time shift buffer* determines the set of required *segment references* in each *representation*. *Media segments* filled with gray need not be referenced due to falling outside the *time shift buffer*, despite falling within the bounds of a *period*.

Note: In a dynamic MPD, each *Media segments* only become *available* when its end point is within their *availability window* (This time may need to be adjusted by *availabilityTimeOffset* (need to be defined) and *@availabilityTimeComplete* values) ([MPEGDASH] 5.3.9.5.1 and 5.3.5.3). It is a valid situation that a *media segment* is required to be referenced but is not yet *available*.

As required by [MPEGDASH] 5.3.9.5.3:

- A *dynamic MPD* remains valid for its entire validity duration after publishing. In other words, a *dynamic MPD* supplies enough *segment references* to allow the *time shift buffer* to extend to  $\text{now} + \text{MPD@minimumUpdatePeriod}$ , where *now* is the current time according to *the synchronized clock*.

As allowed by [MPEGDASH] 7.2.1:

- *Media segment* start/end points may be unaligned with *period* start/end points except when using *simple addressing*. This possible offset is signaled by *@eptDelta*.


An **unnecessary segment reference** is one that is not defined as required by this chapter.

In a *static MPD*, a *representation* SHALL NOT contain *unnecessary segment references*, except when using *indexed addressing* in which case such segment references MAY be present.

In a *dynamic MPD*, a *representation* SHALL NOT contain *unnecessary segment references* except when any of the following applies, in which case an *unnecessary segment reference* MAY be present:

1. The *segment reference* is for future content and will eventually become necessary.
2. The *segment reference* is defined via *indexed addressing*.
3. The *segment reference* is defined by an *<S>* element that defines multiple references using *S@r*, some of which are necessary.
4. Removal of the *segment reference* is not allowed by *content removal constraints*.

Clients SHALL NOT present any samples from *media segments* that are entirely outside the *period*, even if such *media segments* are referenced.

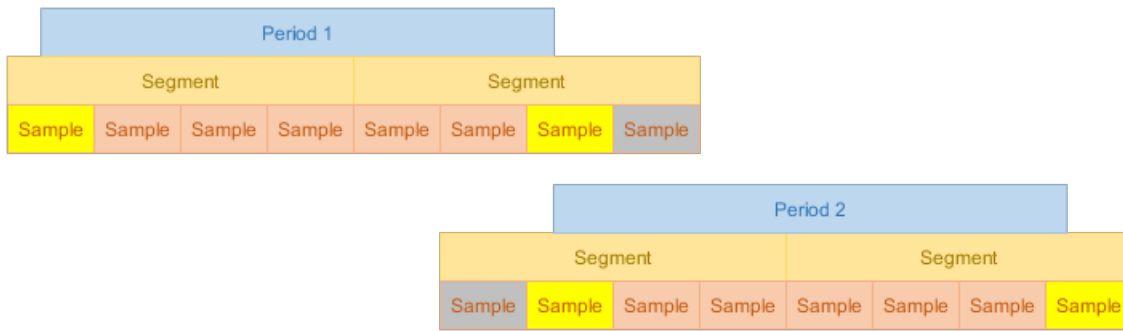


**Figure 8** Media segments and samples need not align with period boundaries. Some samples may be entirely outside a period (marked gray) and some may overlap the period boundary (yellow).

If a media segment overlaps a period boundary, clients SHOULD NOT present the samples that lie outside the period and SHOULD present the samples that lie either partially or entirely within the period.

Note: In the end, which samples are presented is entirely up to the client. It may sometimes be impractical to present media segments only partially, depending on the capabilities of the client platform, the type of media samples involved and any dependencies between samples.

### 5.5. Sample timeline§

The samples within a representation exist on a linear **sample timeline** defined by the encoder that created the samples. One or more sample timelines are mapped onto the MPD timeline by metadata stored in or referenced by the MPD ([MPEGDASH] 7.3.2).

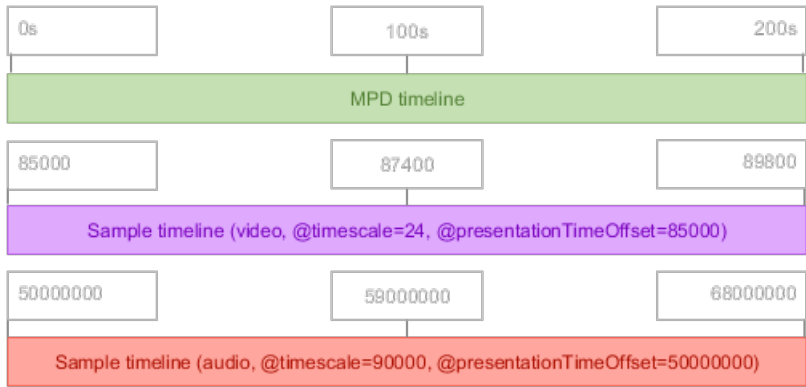

**Figure 9** Sample timelines are mapped onto the MPD timeline based on parameters defined in the MPD.


Note: A sample timeline is linear - encoders are expected to use an appropriate timescale and sufficiently large timestamp fields to avoid any wrap-around. If wrap-around does occur, a new period must be started in order to establish a new sample timeline.

The sample timeline is formed after applying any [ISOBMFF] edit lists ([MPEGDASH] 7.3.2).

This document additionally requires:

- The same sample timeline SHALL be shared by all representations in the same adaptation set. Representations in different adaptation sets MAY use different sample timelines.
- The sample timeline is measured in **timescale units** defined as a number of units per second. This value (the **timescale**) SHALL be present in the MPD as SegmentTemplate@timescale or SegmentBase@timescale (depending on the addressing mode).

Note: While optional in [MPEGDASH], the presence of the @timescale attribute is required by the interoperable timing model because the default value of 1 is unlikely to match any real-world content and is far more likely to indicate an unintentional content authoring error.

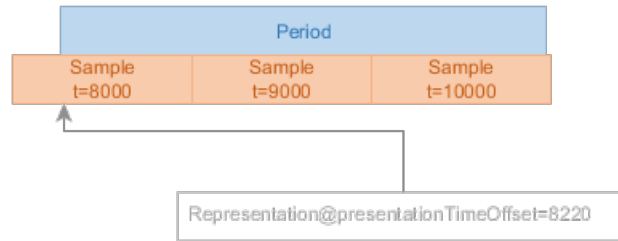

**Figure 10** @presentationTimeOffset is the key component in establishing the relationship between the [MPD timeline](#) and a [sample timeline](#).

The point on the [sample timeline](#) indicated by @presentationTimeOffset is equivalent to the [period](#) start point on the [MPD timeline](#) ([MPEGDASH] Table 15). The value is provided by SegmentTemplate@presentationTimeOffset or SegmentBase@presentationTimeOffset, depending on the [addressing mode](#), and has a default value of 0 [timescale units](#).

Note: To transform a [sample timeline](#) position SampleTime to an [MPD timeline](#) position, use the formula  $MpdTime = Period@start + (SampleTime - @presentationTimeOffset) / @timescale$ .

## 5.6. Clock drift is forbidden§

Some encoders experience clock drift - they do not produce exactly 1 second worth of output per 1 second of input, either stretching or compressing the [sample timeline](#) with respect to the [MPD timeline](#).

This document adds the following requirement:

- A DASH service SHALL NOT publish content that suffers from clock drift.

If a packager receives input from an encoder at the wrong rate, it must take corrective action. For example, it might:

1. Drop a span of content if input is produced faster than real-time.
2. Insert regular padding content if input is produced slower than real-time. This padding can take different forms:
  - Silence or a blank picture.
  - Repeating frames.
  - Insertion of short-duration [periods](#) where the affected [representations](#) are not present.

Of course, such after-the-fact corrective actions can disrupt the end-user experience. The optimal solution is to fix the defective encoder.

## 5.7. Media segments§

A **media segment** is an HTTP-addressable data structure that contains one or more media samples.

Note: Different media segments may be different byte ranges accessed on the same URL.

[MPEGCMF] requires that [Media segments](#) contain one or more consecutive media samples, and consecutive [media segments](#) in the same [representation](#) contain consecutive media samples.

[MPEGDASH] 7.2.1 requires the followings:


- [Media segments](#) contains the media samples that exactly match the time span on the [sample timeline](#) that is assigned to the [media segment](#) by the MPD, except when using [simple addressing](#) in which case a certain amount of inaccuracy may be present as defined in § 5.13.4.1 [Inaccuracy in media segment timing when using simple addressing](#).
- The [media segment](#) that starts at or overlaps the [period](#) start point contains a media sample that starts at or overlaps the [period](#) start point and the [media segment](#) that ends at or overlaps the [period](#) end point contains a media sample that ends at or overlaps the [period](#) end point.

[MPEGCMF] 7.3.4 and [MPEGDASHCMFPROFILE] requires the following:

- [Aligned media segments](#) in different [representations](#) of the same adaptation set contains samples for the same true time span, even if using [simple addressing](#) with [inaccurate media segment timing](#).

### 5.7.1. Media segment duration deviation

When using [simple addressing](#), the samples contained in a media segment may cover a different time span on the [sample timeline](#) than what is indicated by the nominal timing in the [MPD timeline](#). This deviation is defined as the offset between the edges of the nominal time span (as defined by [MPD timeline](#)) and the edges of the true time span (as defined by [=sample timeline]), and is calculated separately for each edge.

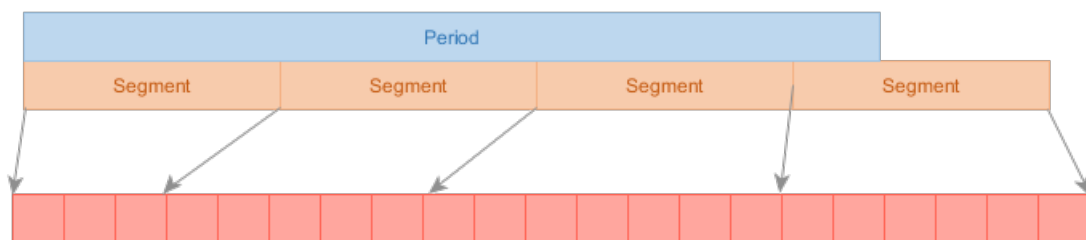

**Figure 11** In simple addressing, a media segment may cover a different time span on the [sample timeline](#) than what is indicated by the nominal timing in the [MPD timeline](#). Red boxes indicate samples.

[MPEGDASH] 7.2.1 requires: The duration deviation is no more than 50% of the nominal media segment duration and may be in either direction.

This document also recommends:

- [Media segments](#) of a [representation](#) SHOULD be equal in duration. Occasional jitter MAY occur (e.g. due to encoder decisions on GOP size).

Note: [DVB-DASH] defines some relevant constraints in section 4.5. Consider obeying these constraints to be compatible with [DVB-DASH].

### 5.7.2. Segments must be aligned

[Media segments](#) are said to be aligned if the earliest presentation time of all [media segments](#) on the [sample timeline](#) is equal in all [representations](#) that belong to the same [adaptation set](#).

[MPEGDASHCMFPROFILE] requires:

- [Media segments](#) are aligned.
- When using [simple addressing](#) or [explicit addressing](#), the media segments alignment is signaled by `AdaptationSet@segmentAlignment=true` in the [MPD](#). When using [indexed addressing](#), this is signaled by

AdaptationSet@subsegmentAlignment=true in the [MPD](#).

## 5.8. Period connectivity


The precise definition of Period connectivity can be found in [\[MPEGDASH\]](#) 5.3.2.4. However, generally speaking, in certain circumstances content may be offered such that a [representation](#) is technically compatible with the content of a [representation](#) in a previous [period](#). Such [representations](#) are **period-connected**.

Any subset of the [representations](#) in a [period](#) may be [period-connected](#) with their counterparts in a future or past [period](#). [Period](#) connectivity may be chained across any number of [periods](#).

Note: Connectivity is generally achieved by using the same encoder to encode the content of multiple [periods](#) using the same settings. Keep in mind, however, that decryption is also a part of the client media pipeline - it is not only the codec parameters that are configured by the initialization segment; different decryption parameters are likely to break connectivity that would otherwise exist.

For signaling the period connectivity between [representation](#) of two periods in a MPD, [\[MPEGDASH\]](#) 5.3.2.4 requires:

- Representation@id is equal.
- AdaptationSet@id is equal.
- The [adaptation set](#) in the second [period](#) has a [supplemental property descriptor](#) with:
  - @schemeIdUri set to urn:mpeg:dash:period-connectivity:2015.
  - @value set to the Period@id of the first period.
- Initialization segments of period-connected [representations](#) to be functionally equivalent (i.e. the initialization segment from any period-connected [representation](#) can be used to initialize playback of any period-connected [representation](#)).

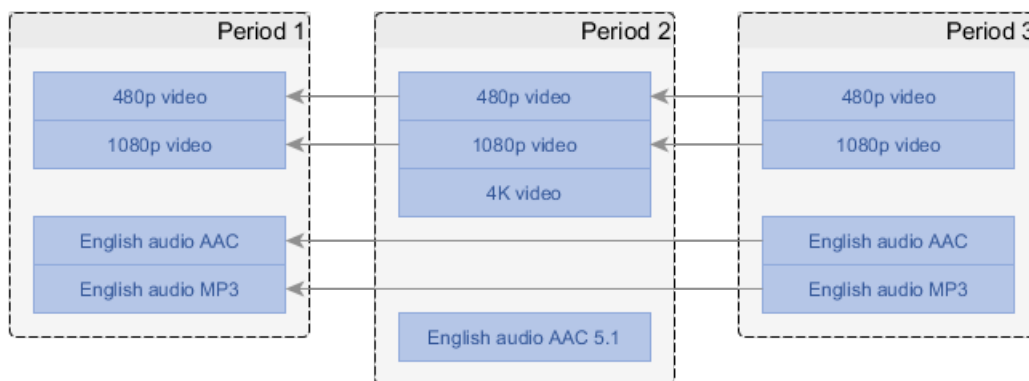


**Figure 12** [Representations](#) can be signaled as [period-connected](#), enabling client optimizations. Arrows on diagram indicate direction of connectivity reference (from future to past), with the implied message being "the client can use the same decoder it used where the arrow points to".

Note: Not all [representations](#) in an [adaptation set](#) need to be [period-connected](#). For example, if a new [period](#) is introduced to add a [representation](#) that contains a new video quality level, all other [representations](#) will likely be connected but not the one that was added.

Note that [\[MPEGDASH\]](#) allows:

- An [MPD](#) may contain unrelated [periods](#) between [periods](#) that contain [period-connected representations](#).
- The [sample timelines](#) of [period-connected representations](#) may be mutually discontinuous (e.g. due to encoder clock wrap-around or skipping some content as a result of editorial decisions).

- As a [period](#) may start and/or end in the middle of a [media segment](#), the same [media segment](#) may simultaneously exist in two [period-connected representations](#), with one part of it scheduled for playback during the first [period](#) and the other part during the second [period](#). This is likely to be the case when no [sample timeline](#) discontinuity is introduced by the transition.

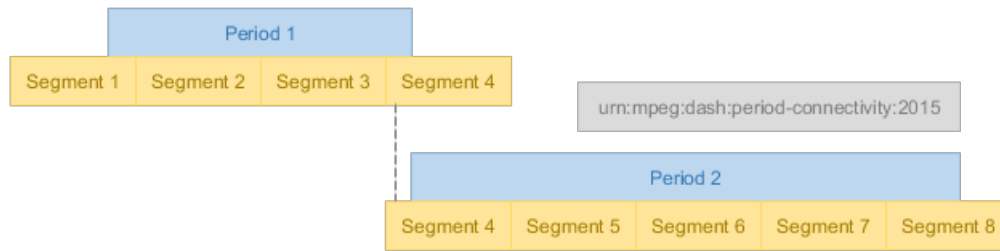

**Figure 13** The same [media segment](#) will often exist in two [periods](#) at a [period-connected](#) transition. On the diagram, this is [segment 4](#).

This document recommends:

- [Media Presentation](#) with connected content cross periods SHOULD be signaled in the [MPD](#) as [period-connected](#). This is expected to help clients ensure seamless playback across [period](#) transitions.

This document also recommends:

- Clients SHOULD NOT present a [media segment](#) twice when it occurs on both sides of a [period](#) transition in a [period-connected representation](#).
- Clients SHOULD ensure seamless playback of [period-connected representations](#) in consecutive [periods](#).

Note: The exact mechanism that ensures seamless playback depends on client capabilities and will be implementation-specific. Any shared [media segment](#) overlapping the [period](#) boundary may need to be detected and deduplicated to avoid presenting it twice.

### 5.8.1. Period continuity<sup>S</sup>

In addition to [period connectivity](#), [\[MPEGDASH\]](#) 5.3.2.4 defines [period](#) continuity, which is a special case of [period](#) connectivity where the two samples on the boundary between the connected [representations](#) are consecutive on the same [sample timeline](#). Continuity implies connectivity.

Note: The above can only be true if the sample boundary exactly matches the [period](#) boundary.

For signaling the period continuity, [\[MPEGDASH\]](#) 5.3.2.4 requires:

- The same signaling as for [period connectivity](#), except that the value to use for `@schemeIdUri` is `urn:mpeg:dash:period-continuity:2015`.

This document requires:

- [Media Presentation](#) with continuous content cross periods SHOULD be signaled in the [MPD](#) with period continuity.
- [period](#) connectivity SHALL NOT be simultaneously signaled on the same [representation](#) for which period continuity is signaled.

This document requires:

- Clients MAY take advantage of any platform-specific optimizations for seamless playback that knowledge of [period](#) continuity enables; beyond that, clients SHALL treat continuity the same as connectivity.

## 5.9. Dynamic MPDs§

This section only applies to [dynamic MPDs](#).

Three main factors differentiate them from [static MPDs](#):

1. The segments described in a [dynamic MPD](#) may become available over time, i.e. not all segments are available.
2. Playback of a [dynamic MPD](#) is synchronized to a real time clock (with some amount of client-chosen time shift allowed).
3. A [dynamic MPD](#) may change over time, with clients retrieving new snapshots of the [MPD](#) when the validity duration of the previous snapshot expires.

[\[MPEGDASH\]](#) 5.4.1 requires:

- A dynamic MPD conforms to the MPD constraints not only at its moment of initial publishing but through the entire **MPD validity duration**, which is a period of `MPD@minimumUpdatePeriod` starting from the moment the MPD download is started by a client, unless overridden by in-band validity expiration signaling.

**The [MPD validity duration](#) starts when the MPD download is initiated by a client, which may be some time after it is generated/published!**

This document requires: DASH clients SHALL support the presentation of [dynamic MPDs](#).

### 5.9.1. Real time clock synchronization§

It is critical to synchronize the clocks of the client with the clock of service when using a [dynamic MPD](#). The time indicated by the clock does not necessarily need to match some universal standard as long as the two are mutually synchronized.

The use of `UTCTiming` is optional in [\[MPEGDASH\]](#).

This document requires:

- A [dynamic MPD](#) SHALL include at least one `UTCTiming` element that defines a clock synchronization mechanism. If multiple `UTCTiming` elements are listed, their order determines the order of preference.
- The set of time synchronization mechanisms SHALL be restricted to the following schemes defined in [\[MPEGDASH\]](#):
  - `urn:mpeg:dash:utc:http-xsdate:2014`
  - `urn:mpeg:dash:utc:http-iso:2014`
  - `urn:mpeg:dash:utc:http-ntp:2014`
  - `urn:mpeg:dash:utc:ntp:2014`
  - `urn:mpeg:dash:utc:http-head:2014`
  - `urn:mpeg:dash:utc:direct:2014`

**The use of a "default time source" is not allowed. The mechanism of time synchronization must always be explicitly defined in the [MPD](#) by every service.**

This document requires:

- A client presenting a [dynamic MPD](#) SHALL synchronize its local clock according to the `UTCTiming` elements in the [MPD](#) and SHALL emit a warning or error to application developers when clock synchronization fails, no



UTCTiming elements are defined or none of the referenced clock synchronization mechanisms are supported by the client.

**ISSUE 1** We could benefit from some detailed examples here, especially as clock sync is such a critical element of live services.

## 5.9.2. Availability

A [media segment](#) is **available** when an HTTP request to acquire the [media segment](#) can be started and successfully performed to completion by a client. During playback of a [dynamic MPD](#), new [media segments](#) continuously become [available](#) and stop being [available](#) with the passage of time. [\[MPEGDASH\]](#) defines the **segment availability times** of a segment as the duration in wall-clock time in which that segment is available.

An **availability window** is a time span on the [MPD timeline](#) that determines which [media segments](#) can be expected to be [available](#). Each [representation](#) has its own [availability window](#). Consequently, [availability window](#) at each moment is defined by the union of [segment availability times](#) of all available segments at that moment.

A segment start point (referred to as "MPD start time of a segment in [\[MPEGDASH\]](#)") is the presentation start time of the segment in [MPD timeline](#).

The **segment end point** is the presentation end time of the segment in [MPD timeline](#).


[\[MPEGDASH\]](#) requires:

- A service makes [available](#) all [media segments](#) that have their end point inside or at the end of the [availability window](#).

**It is the responsibility of the service to ensure that [media segments](#) are [available](#) to clients when they are described as [available](#) by the [MPD](#). Consider that the criterium for availability is a successful download by clients, not successful publishing from a packager.**

The [availability window](#) is calculated as follows:

1. Let *now* be the current wall clock time according to [the synchronized clock](#).
2. Let *AvailabilityWindowStart* be  $now - MPD@timeShiftBufferDepth$ .
  - If  $MPD@timeShiftBufferDepth$  is not defined, let *AvailabilityWindowStart* be  $MPD@availabilityStartTime$ .
3. Let *TotalAvailabilityTimeOffset* be the sum of all  $@availabilityTimeOffset$  values that apply to the [representation](#) (those directly on the [Representation](#) element and any of its ancestors).
4. The [availability window](#) is the time span from *AvailabilityWindowStart* to  $now + TotalAvailabilityTimeOffset$ .

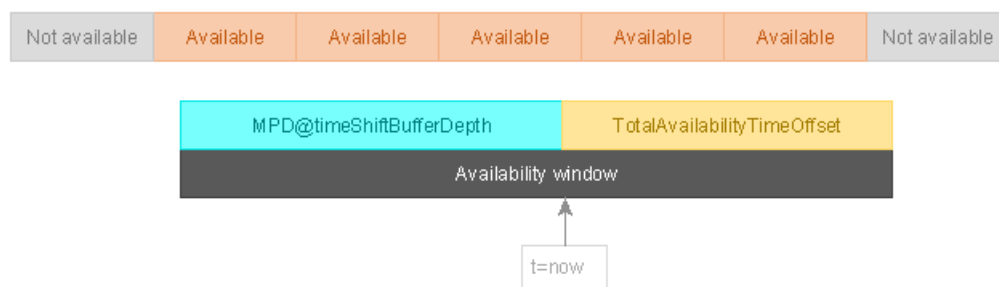

**Figure 14** The [availability window](#) determines which [media segments](#) can be expected to be [available](#), based on where their [segment end point](#) lies.

This document requires:

- Clients MAY at any point attempt to acquire any [media segments](#) that the [MPD](#) signals as [available](#). Clients SHALL NOT attempt to acquire [media segments](#) that the [MPD](#) does not signal as [available](#).
- Clients SHOULD NOT assume that [media segments](#) described by the [MPD](#) as [available](#) are [available](#) and SHOULD implement appropriate retry/fallback behavior to account for timing errors by slow-publishing or eagerly-unpublishing services.

### 5.9.3. Time shift buffer

The **time shift buffer** is a time span on the [MPD timeline](#) that defines the set of [media segments](#) that a client is allowed to present at the current moment in time according to [the synchronized clock](#) (now).


This is the mechanism by which clients can introduce a **time shift** (an offset) between real time and the [MPD timeline](#) when presenting [dynamic MPDs](#). The [time shift](#) is zero when a client always chooses to play back the [media segment](#) at the end point of the [time shift buffer](#). By playing back [media segments](#) from further in the past, a [time shift](#) is introduced.

Note: A [time shift](#) of 30 seconds means that the client starts presenting a [media segment](#) at the moment when its position on the [MPD timeline](#) reaches a distance of 30 seconds from the end of the [time shift buffer](#).

The following additional factors further constrain the set of [media segments](#) that can be presented at the current time and can force a client to introduce a [time shift](#):

1. [§ 5.9.2 Availability](#) - not every [media segment](#) in the time shift buffer is guaranteed to be [available](#).
2. [§ 5.9.4 Presentation delay](#) - the service may define a delay that forbids the use of a section of the [time shift buffer](#).

The [time shift buffer](#) extends from `now - MPD@timeShiftBufferDepth` to `now`. In the absence of `MPD@timeShiftBufferDepth` the start of the [time shift buffer](#) is `MPD@availabilityStartTime`.

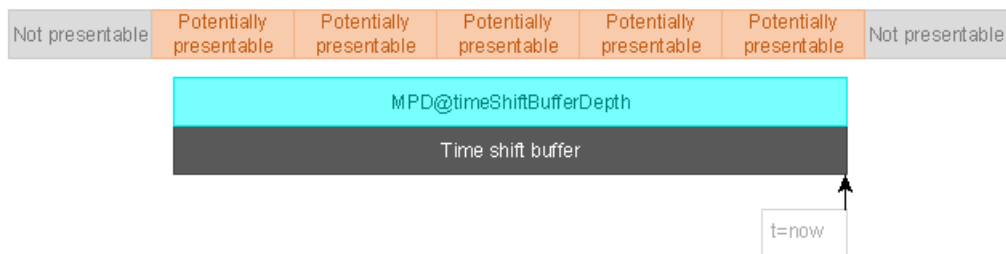

**Figure 15** [Media segments](#) overlapping the [time shift buffer](#) may potentially be presented by a client, if other constraints do not forbid it.

This document requires:

- Clients MAY present samples from [media segments](#) that overlap (either in full or in part) the time shift buffer, assuming no other constraints forbid it.
- Clients SHALL NOT present samples from [media segments](#) that are entirely outside the [time shift buffer](#) (whether in the past or the future).
- The start of the [time shift buffer](#) may be before the start of the first [period](#). Clients SHALL NOT use regions of the [time shift buffer](#) that are not covered by [periods](#).

A [dynamic MPD](#) SHALL contain a [period](#) that ends at or overlaps the end point of the [time shift buffer](#), except when reaching [the end of live content](#) in which case the last [period](#) MAY end before the end of the [time shift buffer](#).

### 5.9.4. Presentation delay

There is a natural conflict between the [availability window](#) and the [time shift buffer](#). It is legal for a client to present [media segments](#) as soon as they overlap the [time shift buffer](#), yet such [media segments](#) might not yet be [available](#).

Furthermore, the delay between [media segments](#) entering the [time shift buffer](#) and becoming [available](#) might be different for different [representations](#) that use different [media segment](#) durations. This difference may also change over time if a [representation](#) does not use a constant [media segment](#) duration.

This document requires:

- Clients SHALL calculate a suitable **presentation delay** to ensure that the [media segments](#) it schedules for playback are [available](#) and that there is sufficient time to download them once they become [available](#). In essence, the [presentation delay](#) decreases the [time shift buffer](#), creating an [effective time shift buffer](#) with a reduced duration.

[MPEGDASH] allows:


- Services may define the `MPD@suggestedPresentationDelay` attribute to provide a suggested [presentation delay](#).

This document requires:

- Clients SHOULD use `MPD@suggestedPresentationDelay` when provided, ignoring the calculated value.

Note: As different clients might use different algorithms for calculating the presentation delay, providing `MPD@suggestedPresentationDelay` enables services to roughly synchronize the playback start position of clients.

The **effective time shift buffer** is the time span from the start of the [time shift buffer](#) to `now - PresentationDelay`.

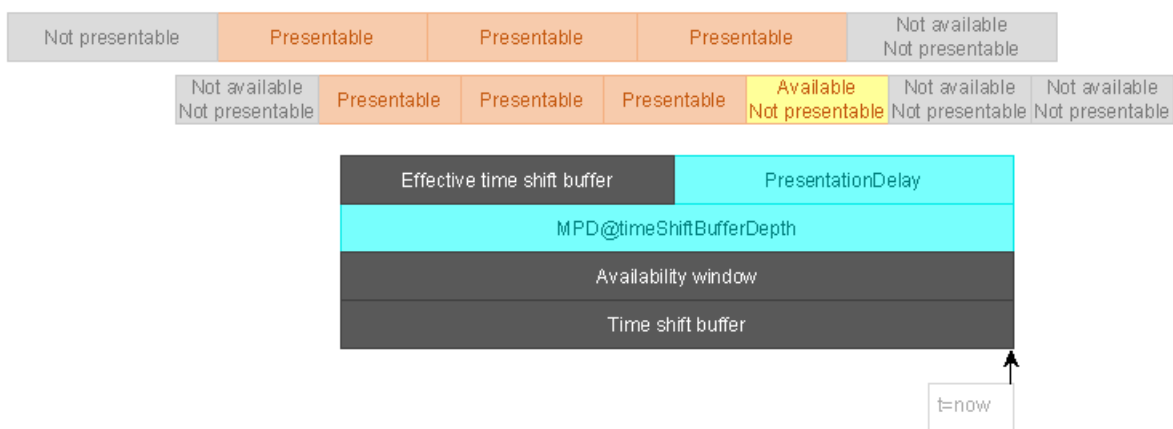

**Figure 16** [Media segments](#) that overlap the [effective time shift buffer](#) are the ones that may be presented at time `now`. Two [representations](#) with different segment lengths are shown. Diagram assumes `@availabilityTimeOffset=0`.

This document requires:

- Clients SHALL constrain seeking to the [effective time shift buffer](#). Clients SHALL NOT attempt to present [media segments](#) that fall entirely outside the [effective time shift buffer](#).

**A common error in DASH content authoring is to attempt to use `MPD@minBufferTime` to control the [presentation delay](#). This attribute describes the jitter in content encoding and is determined by the encoder or derived from the encoder configuration.**

### 5.9.5. MPD updates

[Dynamic MPDs](#) may change over time. The nature of the change is not restricted unless such a restriction is explicitly defined.

Some common reasons to make changes in [dynamic MPDs](#):

- Adding new [segment references](#) to an existing [period](#).
- Adding new [periods](#).
- Converting unlimited-duration [periods](#) to fixed-duration [periods](#) by adding `Period@duration`.
- Removing [segment references](#) and/or [periods](#) that have fallen out of the [time shift buffer](#).
- Shortening an existing [period](#) when changes in content scheduling take place.
- Removing `MPD@minimumUpdatePeriod` to signal that [MPD](#) will no longer be updated.
- Converting the [MPD](#) to a [static MPD](#) to signal that a live service has become available on-demand as a recording.

[MPEGDASH] 5.4.1 requires the following restrictions for MPD updates:

- `MPD@id` does not change.
- `MPD.Location` does not change.
- `MPD@availabilityStartTime` does not change.
- `Period@id` does not change.
- `Period@start` does not change.
- `Period@duration` does not change except when explicitly allowed by other statements in this document.
- The [adaptation sets](#) present in a [period](#) (i.e. the set of `AdaptationSet@id` values) does not change.
- The [representations](#) present in an [adaptation set](#) (i.e. the set of `Representation@id` values) does not change.
- The functional behavior of a [representation](#) (identified by a matching `Representation@id` value) does not change, neither in terms of metadata-driven behavior (including metadata inherited from [adaptation set](#) level) nor in terms of [media segment](#) timing. In particular:
  - `SegmentTemplate@presentationTimeOffset` does not change.
  - `SegmentBase@presentationTimeOffset` does not change.

**Additional restrictions on MPD updates are defined by other parts of this document.**

This document requires:

- The presence or absence of `MPD@minimumUpdatePeriod` SHALL be used by a service to signal whether the MPD might be updated (with presence indicating potential for future updates). The value of this field indicates the [MPD validity duration](#) of the present snapshot of the [MPD](#), starting from the moment its download was initiated. Absence of the `MPD@minimumUpdatePeriod` attribute indicates an infinite validity (the [MPD](#) will never be updated). The value 0 indicates that the [MPD](#) has no validity after the moment it was retrieved.
- Since clients usually require some time to download and process an [MPD](#) update, a service SHOULD NOT assume perfect update timing.
- In addition to signaling that clients are expected to poll for regular [MPD](#) updates, a service MAY publish in-band events to update the MPD validity duration at moments of its choosing.

This document also requires:

- Clients SHOULD use `@id` to track [period](#), [adaptation set](#) and [representation](#) identity across MPD updates.
- Clients SHALL process state changes that occur during the [MPD validity duration](#). For example new [media segments](#) will become [available](#) over time if they are referenced by the [MPD](#) and old ones become [unavailable](#), even without an [MPD](#) update.


- `MPD@minimumUpdatePeriod = 0` indicates that the [MPD](#) has no validity after the moment it was retrieved. In such a situation, the client SHALL have to acquire a new [MPD](#) whenever it wants to make new [media segments](#) available (no "natural" state changes will occur).
- Clients SHOULD NOT assume that they can get all updates in time (they may already be attempting to buffer some [media segments](#) that were removed by an [MPD](#) update).

### 5.9.5.1. Adding content to the MPDs

[\[MPEGDASH\]](#) allows two mechanisms for adding content:

- Additional [segment references](#) may be added to the last [period](#).
- Additional [periods](#) may be added to the end of the MPD.

Multiple content adding mechanisms may be combined in a single [MPD](#) update. An [MPD](#) update that adds content may be combined [with an MPD update that removes content](#).

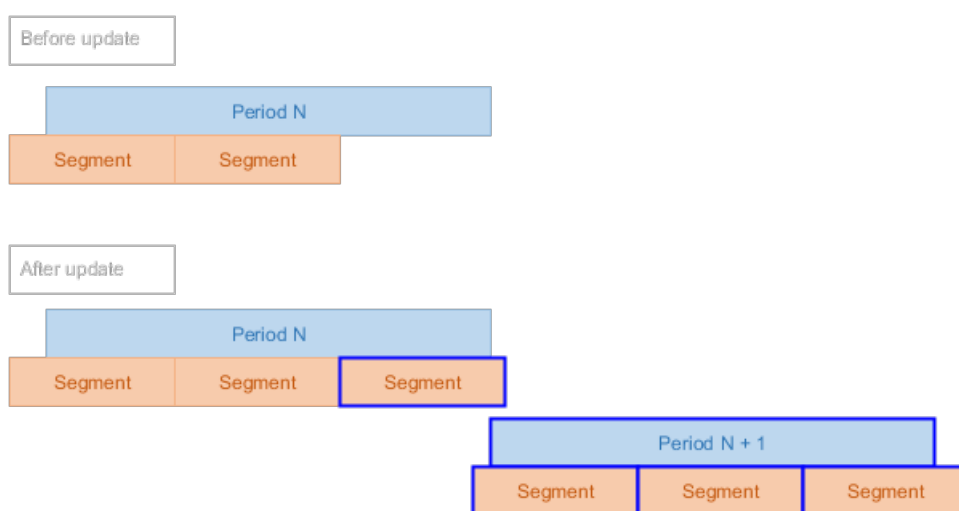

**Figure 17** [MPD](#) updates can add both [segment references](#) and [periods](#) (additions highlighted in blue).

This document requires:

- [Segment references](#) SHALL NOT be added to any [period](#) other than the last [period](#).
- An MPD update MAY combine adding [segment references](#) to the last [period](#) with adding of new [periods](#).

Note: The duration of the last [period](#) cannot change as a result of adding [segment references](#). A live service will generally use a [period](#) with an unlimited duration to continuously add new [segment references](#).


When using [simple addressing](#) or [explicit addressing](#), it is possible for a [period](#) to define an infinite sequence of [segment references](#) that extends to the end of the [period](#) (e.g. using `SegmentTemplate@duration` or `r="-1"`). Such self-extending reference sequences are equivalent to explicitly defined [segment reference](#) sequences that extend to the end of the [period](#) and clients MAY obtain new [segment references](#) from such sequences even between [MPD](#) updates.

### 5.9.5.2. Removing content from the MPDs

Removal of content is only allowed if the content to be removed is not yet [available](#) to clients and guaranteed not to become [available](#) until clients receive the [MPD](#) update. See [§ 5.9.2 Availability](#).

To determine the content that may be removed, let `EarliestRemovalPoint` be `availability window end + MPD@minimumUpdatePeriod`.

Note: As each [representation](#) has its own [availability window](#), so does each [representation](#) have its own `EarliestRemovalPoint`.

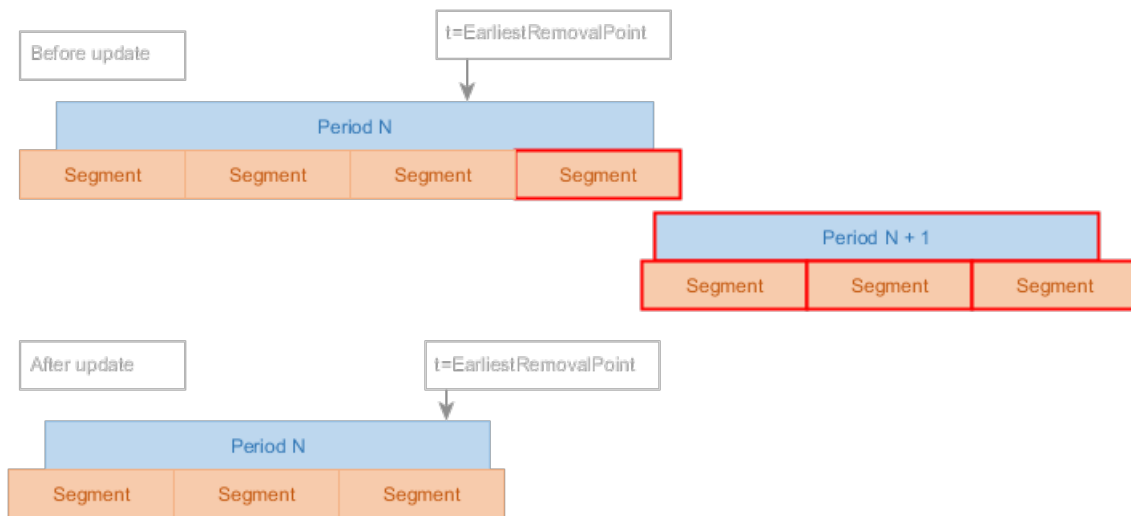

**Figure 18** [MPD](#) updates can remove both [segment references](#) and [periods](#) (removals highlighted in red).

An [MPD](#) update removing content MAY remove any [segment references](#) to [media segments](#) that start after `EarliestRemovalPoint` at the time the update is published.

[Media segments](#) that overlap or end before `EarliestRemovalPoint` might be considered by clients to be [available](#) at the time the [MPD](#) update is processed and therefore SHALL NOT be removed by an [MPD](#) update.

The following mechanisms exist removing content:

- The last [period](#) MAY change from unlimited duration to fixed duration.
- The duration of the last [period](#) MAY be shortened.
- One or more [periods](#) MAY be removed entirely from the end of the [MPD](#).

Multiple content removal mechanisms MAY be combined in a single [MPD](#) update.

Note: When using [indexed addressing](#) or [simple addressing](#), removal of [segment references](#) from the end of the [period](#) only requires changing `Period@duration`. When using [explicit addressing](#), pruning some `S` elements may be appropriate to avoid leaving [unnecessary segment references](#).

Clients SHALL NOT fail catastrophically if an [MPD](#) update removes already buffered data but MAY incur unexpected [time shift](#) or a visible transition at the point of removal. It is the responsibility of the service to avoid removing data that may already be in use.

In addition to editorial removal from the end of the [MPD](#), content naturally expires due to the passage of time. Expired content also needs to be removed:

- Explicitly defined [segment references](#) (`S` elements) SHALL be removed when they have expired (i.e. the [media segment](#) end point has fallen out of the [time shift buffer](#)).
  - A repeating explicit [segment reference](#) (`S` element with `@r != 0`) SHALL NOT be removed until all repetitions have expired.
- [Periods](#) with their end points before the time shift buffer SHALL be removed.

An [MPD](#) update that removes content MAY be combined [with an MPD update that adds content](#).

### 5.9.5.3. End of live content§

Live services can reach a point where no more content will be produced - existing content will be played back by clients and once they reach the end, playback will cease.

This document requires:

- When this occurs, services SHALL define a fixed duration for the last [period](#), remove the `MPD@minimumUpdatePeriod` attribute and cease performing [MPD](#) updates to signal that no more content will be added to the [MPD](#).
- The `MPD@type` MAY be changed to `static` at this point or later if the service is to be converted to a [static MPD](#) for on-demand viewing.

### 5.9.6. MPD refreshes§

To stay informed of the [MPD](#) updates, clients need to perform **MPD refreshes** at appropriate moments to download the updated [MPD](#) snapshots.

Clients presenting [dynamic MPDs](#) SHALL execute the following [MPD](#) refresh logic:

1. When an [MPD](#) snapshot is downloaded, it is valid for the present moment and at least `MPD@minimumUpdatePeriod` after that.
2. A client can expect to be able to successfully download any [media segments](#) that the [MPD](#) defines as [available](#) at any point during the [MPD validity duration](#).
3. The clients MAY refresh the [MPD](#) at any point. Typically this will occur because the client wants to obtain more [segment references](#) or make more [media segments](#) (for which it might already have references) [available](#) by extending the [MPD](#) validity duration.
  - This may result in a different [MPD](#) snapshot being downloaded, with updated information.
  - Or it may be that the [MPD](#) has not changed, in which case its validity period is extended to `now + MPD@minimumUpdatePeriod`.

Note: There is no requirement that clients poll for updates at `MPD@minimumUpdatePeriod` interval. They can do so as often or as rarely as they wish - this attribute simply defines the [MPD](#) validity duration.

Services may publish in-band events to explicitly signal MPD validity instead of expecting clients to regularly refresh on their own initiative. This enables finer control by the service but might not be supported by all clients.

Services SHALL NOT require clients to support in-band events.

#### 5.9.6.1. Conditional MPD downloads§

It can often be the case that a live service signals a short [MPD](#) validity period to allow for the possibility of terminating the last [period](#) with minimal end-to-end latency. At the same time, generating future [segment references](#) might not require any additional information to be obtained by clients. That is, a situation might occur where constant [MPD refreshes](#) are required but the [MPD](#) content rarely changes.

Clients using HTTP to perform [MPD refreshes](#) SHOULD use conditional GET requests as specified in [\[RFC7232\]](#) to avoid unnecessary data transfers when the contents of the [MPD](#) do not change between refreshes.

## 5.10. Timing of stand-alone IMSC1 and WebVTT text files§

Some services store text adaptation sets in stand-alone IMSC1 or WebVTT files, without segmentation or [\[ISOBMF F\]](#) encapsulation.

This document requires:

- Timecodes in stand-alone text files SHALL be relative to the [period](#) start point.
- `@presentationTimeOffset` SHALL NOT be present and SHALL be ignored by clients if present.

### EXAMPLE 2

IMSC1 subtitles in stored in a stand-alone XML file.

```
<AdaptationSet mimeType="application/ttml+xml" lang="en-US">
  <Role schemeIdUri="urn:mpeg:dash:role:2011" value="subtitle" />
  <Representation>
    <BaseURL>subtitles_en_us.xml</BaseURL>
  </Representation>
</AdaptationSet>
```

Parts of the [MPD](#) structure that are not relevant for this chapter have been omitted - this is not a fully functional AdaptationSet element.

## 5.11. Forbidden techniques§

Some aspects of [\[MPEGDASH\]](#) are not compatible with the interoperable timing model defined in this document. In the interest of clarity, they are explicitly listed here:


- The `@presentationDuration` attribute SHALL NOT be used.

## 5.12. Examples§

This section is informative.

### 5.12.1. Offer content with imperfectly aligned tracks§

It may be that for various content processing workflow reasons, some tracks have a different duration from others. For example, the audio track might start a fraction of a second before the video track and end some time before the video track ends.

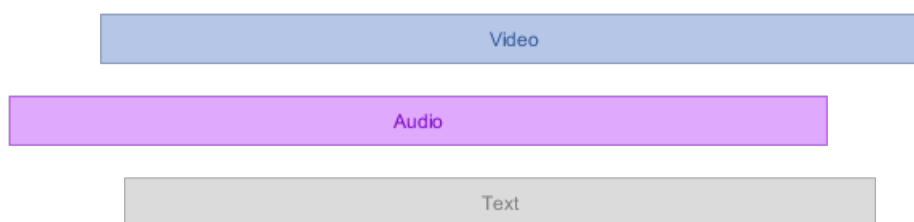

**Figure 19** Content with different track lengths, before packaging as DASH.

You now have some choices to make in how you package these tracks into a DASH presentation that conforms to this document. Specifically, there exists the requirement that every [representation](#) must cover the entire [period](#) with media samples.






**Figure 20** Content may be cut (indicated in black) to equalize track lengths.

The simplest option is to define a single [period](#) that contains [representations](#) resulting from cutting the content to match the shortest common time span, thereby covering the entire [period](#) with samples. Depending on the nature of the data that is removed, this may or may not be acceptable.




**Figure 21** Content may be padded (indicated in green) to equalize track lengths.

If you wish to preserve track contents in their entirety, the most interoperable option is to add padding samples (e.g. silence or black frames) to all tracks to ensure that all [representations](#) have enough data to cover the entire [period](#) with samples. This may require customization of the encoding process, as the padding must match the codec configuration of the real content and might be impractical to add after the real content has already been encoded.

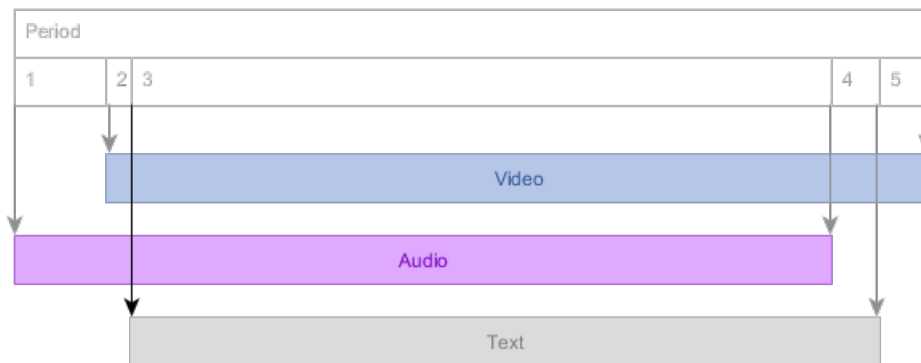

**Figure 22** New [periods](#) may be started at any change in the set of available tracks.

Another option that preserves track contents is to [split the content](#) into multiple [periods](#) that each contain a different set of [representations](#), starting a new [period](#) whenever a track starts or ends. This enables you to ensure every [representations](#) covers its [period](#) with samples. The upside of this approach is that it can be done easily, requiring only manipulation of the MPD. The downside is that some clients may be unable to seamlessly play across every [period](#) transition.

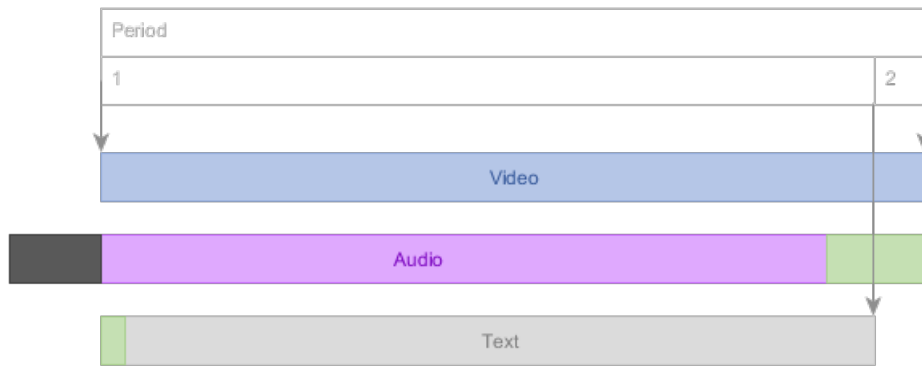

**Figure 23** You may combine the different approaches, cutting in some places (black), padding in others (green) and defining multiple [periods](#) as needed.

You may wish to combine the different approaches, depending on the track, to achieve the optimal result.

Some clients are known to fail when transitioning from a [period](#) with audio and video to a [period](#) with only one of these components. You should avoid such transitions unless you have exact knowledge of the capabilities of your clients.


### 5.12.2. Split a period

There exist scenarios where you would wish to split a [period](#) in two. Common reasons would be:

- to insert an ad [period](#) in the middle of an existing [period](#).
- parameters of one [adaptation set](#) change (e.g. KID or display aspect ratio), requiring a new [period](#) to update signaling.
- some [adaptation sets](#) become available or unavailable (e.g. different languages).

This example shows how an existing [period](#) can be split in a way that clients capable of [seamless period-connected playback](#) do not experience interruptions in playback among [representations](#) that are present both before and after the split.

Our starting point is a presentation with a single [period](#) that contains an audio [representation](#) with short samples and a video [representation](#) with slightly longer samples, so that [media segment](#) start points do not always overlap.

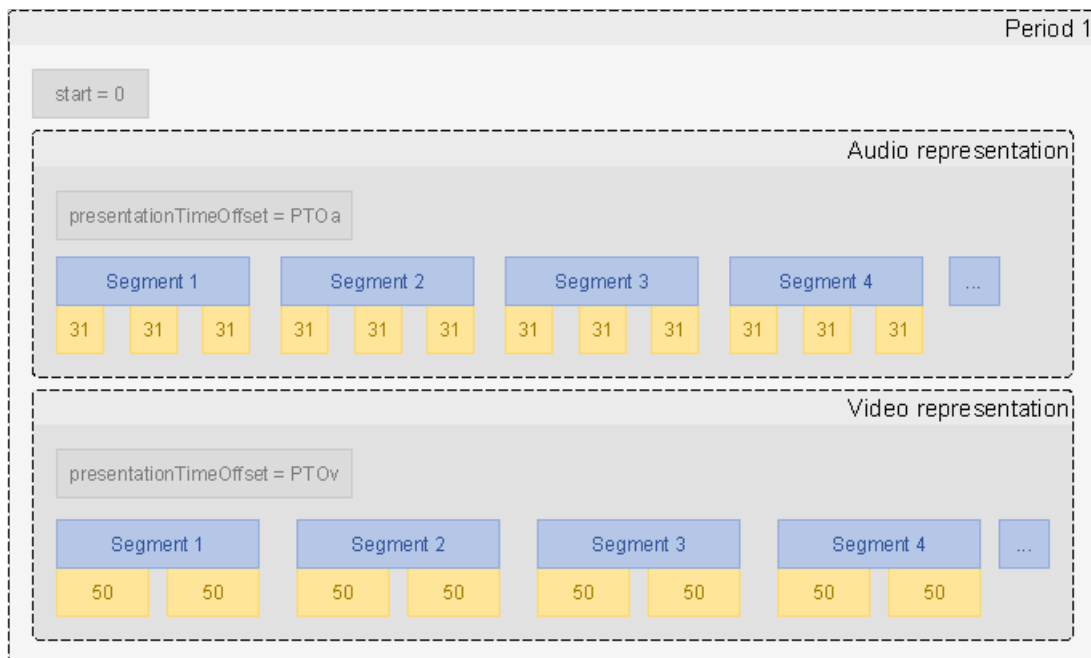

**Figure 24** Presentation with one period, before splitting. Blue is a segment, yellow is a sample. Duration in arbitrary units is listed on samples. Segment durations are taken to be the sum of sample durations. `presentationTimeOffset` may have any value - it is listed because will be referenced later.


Note: [Periods](#) may be split at any point in time as long as both sides of the split remain in conformance to this document (e.g. each contains at least 1 [media segment](#)). Furthermore, [period](#) splitting does not require manipulation of the segments themselves, only manipulation of the MPD.

Let's split this [period](#) at position 220. This split occurs during segment 3 for both [representations](#) and during sample 8 and sample 5 of the audio and video [representation](#), respectively.

The mechanism that enables [period](#) splitting in the middle of a segment is the following:

- a [media segment](#) that overlaps a [period](#) boundary exists in both [periods](#).
- [representations](#) that are split are signaled in the MPD as [period-connected](#).
- a representation that is [period-connected](#) with a representation in a previous [period](#) is marked with the [period connectivity descriptor](#).
- clients are expected to deduplicate boundary-overlapping [media segments](#) for [representations](#) on which [period connectivity](#) is signaled, if necessary for seamless playback (implementation-specific).
- clients are expected to present only the samples that are within the bounds of the current [period](#) (may be limited by client platform capabilities).

After splitting the example presentation, we arrive at the following structure.

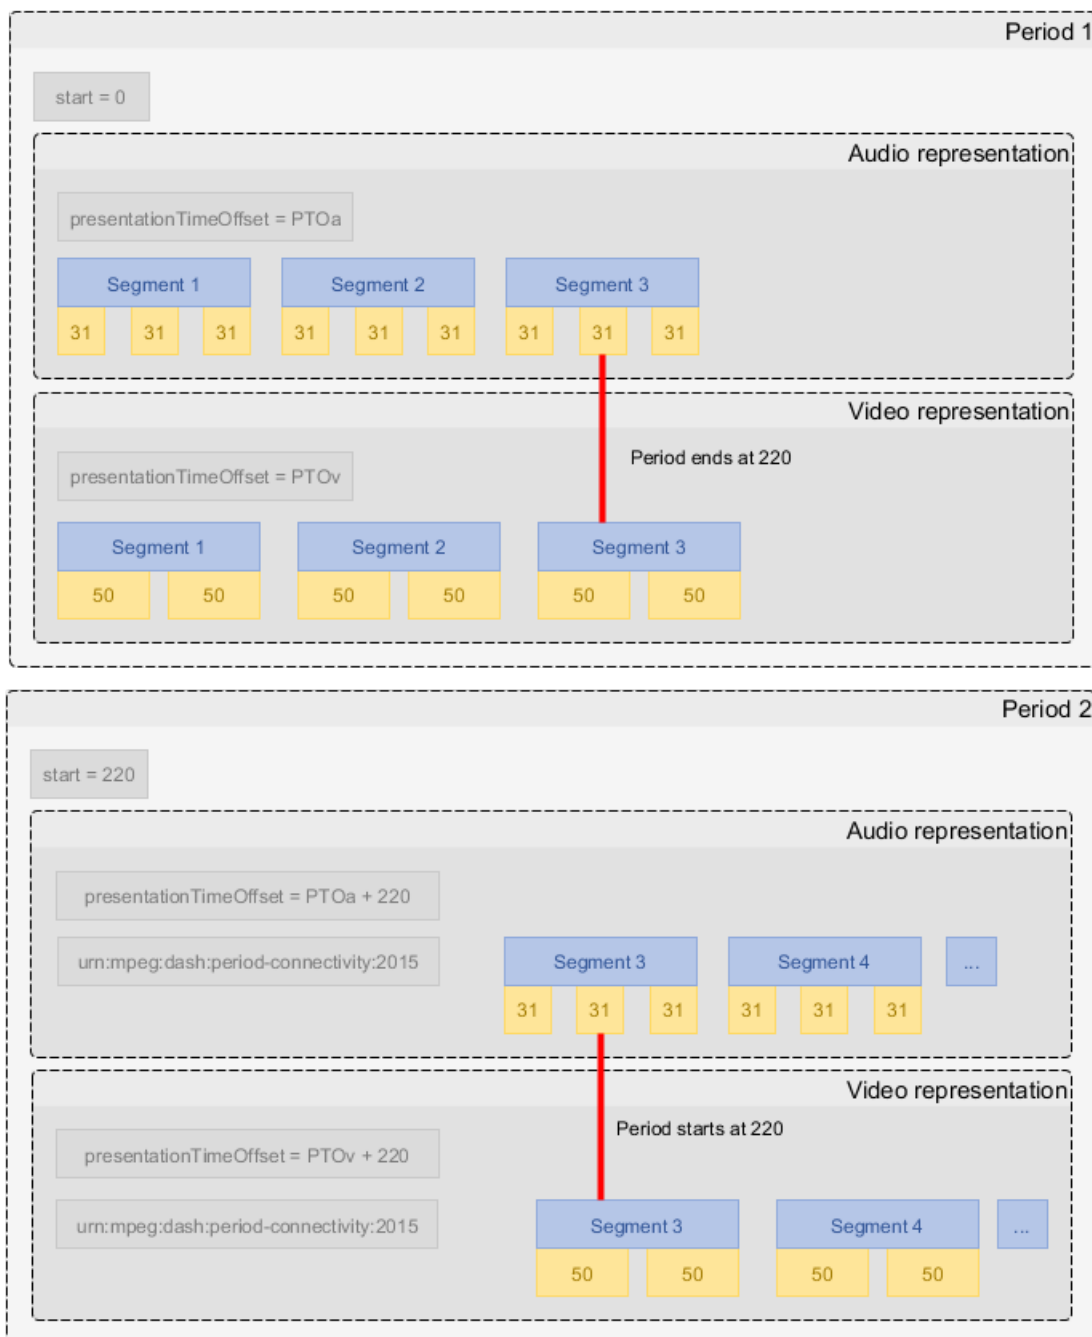

**Figure 25** Presentation with two periods, after splitting. Audio segment 3 and video segment 3 are shared by both periods, with the connectivity signaling indicating that seamless playback with de-duplicating behavior is expected from clients.

If indexed addressing is used, both periods will reference all segments as both periods will use the same unmodified index segment. Clients are expected to ignore media segments that fall outside the period bounds.

**Simple addressing** has significant limitations on alignment at period start, making it unsuitable for some multi-period scenarios. See § 5.13.4.2 Moving the period start point (simple addressing).


Other periods (e.g. ads) may be inserted between the two periods resulting from the split. This does not affect the addressing and timing of the two periods.

### 5.12.3. Change the default\_KID

In encrypted content, the `default_KID` of a representation might need to be changed at certain points in time. Often, the changes are closely synchronized in different representations.

To perform the `default_KID` change, start a new [period](#) on every change, treating each [representation](#) as an independently changing element. With proper signaling, clients can perform this change seamlessly.

## ISSUE 2 What about [period](#) connectivity? #238

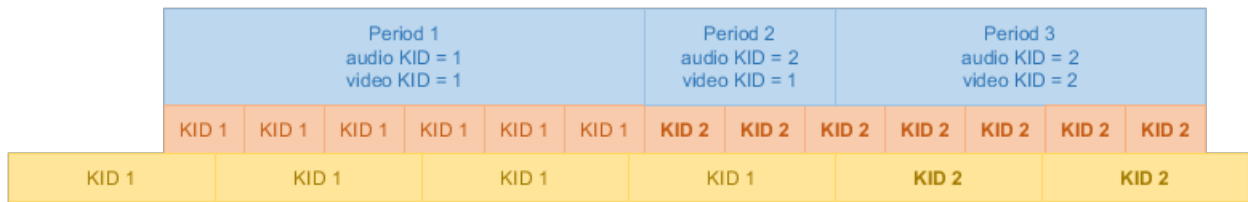

**Figure 26** A change in `default_KID` starts a new [period](#). Orange indicates audio and yellow video [representation](#).

The same pattern can also be applied to other changes in [representation](#) configuration.

### 5.13. Segment addressing modes

This section defines the **addressing modes** that can be used for referencing [media segments](#), [initialization segments](#) and [index segments](#) in interoperable DASH presentations.

[Addressing modes](#) not defined in this chapter SHALL NOT be used by DASH services. Clients SHOULD support all [addressing modes](#) defined in this chapter.

All [representations](#) in the same [adaptation set](#) SHALL use the same [addressing mode](#). [Representations](#) in different [adaptation sets](#) MAY use different [addressing modes](#). [Period-connected representations](#) SHALL use the same [addressing mode](#) in every [period](#).

You SHOULD choose the addressing mode based on the nature of the content:

↔ **Content generated on the fly**

Use [explicit addressing](#).

↔ **Content generated in advance of publishing**

Use [indexed addressing](#) or [explicit addressing](#).

A service MAY use [simple addressing](#) which enables the packager logic to be very simple. This simplicity comes at a cost of reduced applicability to multi-period scenarios and reduced client compatibility.

Note: Future updates to [\[MPEGDASH\]](#) are expected to eliminate the critical limitations of [simple addressing](#), enabling a wider range of applicable use cases.

## ISSUE 3 Update to match [\[MPEGDASH\]](#) 4th edition.

[Indexed addressing](#) enables all data associated with a single [representation](#) to be stored in a single [CMAF track file](#) from which byte ranges are served to clients to supply [media segments](#), the [initialization segment](#) and the [index segment](#). This gives it some unique advantages:

- A single large file is more efficient to transfer and cache than 100 000 or more small files, reducing computational and I/O overhead.
- CDNs are aware of the nature of byte-range requests and can preemptively read-ahead to fill the cache ahead of playback.


#### 5.13.1. Indexed addressing

A representation that uses **indexed addressing** consists of a [CMAF track file](#) containing an [index segment](#), an [initialization segment](#) and a sequence of [media segments](#).

Note: This addressing mode is sometimes called "SegmentBase" in other documents.

Clauses in section only apply to [representations](#) that use [indexed addressing](#).

Note: [\[MPEGDASH\]](#) makes a distinction between "segment" (HTTP-addressable entity) and "subsegment" (byte range of an HTTP-addressable entity). This document does not make such a distinction and has no concept of subsegments. Usage of "segment" here matches the definition of CMAF segment [\[MPEGCMAF\]](#).

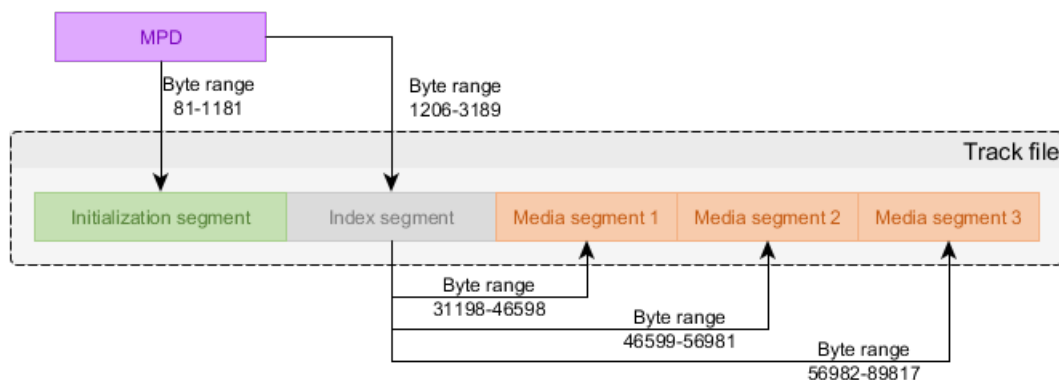

**Figure 27** *Indexed addressing is based on an [index segment](#) that references all [media segments](#).*

The [MPD](#) defines the byte range in the [CMAF track file](#) that contains the [index segment](#). The [index segment](#) informs the client of all the [media segments](#) that exist, the time spans they cover on the [sample timeline](#) and their byte ranges.

Multiple [representations](#) SHALL NOT be stored in the same [CMAF track file](#) (i.e. no multiplexed [representations](#) are to be used).

At least one [Representation/BaseURL](#) element SHALL be present in the [MPD](#), containing a URL pointing to the [CMAF track file](#).

The `SegmentBase@indexRange` attribute SHALL be present in the [MPD](#). The value of this attribute identifies the byte range of the [index segment](#) in the [CMAF track file](#). The value is a `byte-range-spec` as defined in [\[RFC7233\]](#), referencing a single range of bytes.

The `SegmentBase@timescale` attribute SHALL be present and its value SHALL match the value of the `timescale` field in the [index segment](#) (in the [\[ISOBMFF\]](#) `sidc` box) and the value of the `timescale` field in the [initialization segment](#) (in the `tkhd` box [\[ISOBMFF\]](#)).

The `SegmentBase/Initialization@range` attribute SHALL identify the byte range of the initialization segment in the [CMAF track file](#). The value is a `byte-range-spec` as defined in [\[RFC7233\]](#), referencing a single range of bytes. The `Initialization@sourceURL` attribute SHALL NOT be used.

### EXAMPLE 3

Below is an example of common usage of [indexed addressing](#).

The example defines a [timescale](#) of 48000 units per second, with the [period](#) starting at position 8100 (or 0.16875 seconds) on the [sample timeline](#). The client can use the [index segment](#) referenced by `indexRange` to determine where the [media segment](#) containing position 8100 (and all other [media segments](#)) can be found. The byte range of the [initialization segment](#) is also provided.

```
<MPD xmlns="urn:mpeg:dash:schema:mpd:2011">
  <Period>
    <AdaptationSet>
      <Representation>
        <BaseURL>showreel_audio_dashinit.mp4</BaseURL>
        <SegmentBase timescale="48000" presentationTimeOffset="8100" indexRange="848-999">
          <Initialization range="0-847"/>
        </SegmentBase>
      </Representation>
    </AdaptationSet>
  </Period>
</MPD>
```

Parts of the [MPD](#) structure that are not relevant for this chapter have been omitted - this is not a fully functional [MPD](#) file.

### 5.13.2. Structure of the index segments

The [index segment](#) SHALL consist of a single Segment Index Box (`sidx`) as defined by [\[ISOBMFF\]](#). The field layout is as follows:

```
aligned(8) class SegmentIndexBox extends FullBox('sidx', version, 0) {
  unsigned int(32) reference_ID;
  unsigned int(32) timescale;

  if (version==0) {
    unsigned int(32) earliest_presentation_time;
    unsigned int(32) first_offset;
  }
  else {
    unsigned int(64) earliest_presentation_time;
    unsigned int(64) first_offset;
  }

  unsigned int(16) reserved = 0;
  unsigned int(16) reference_count;

  for (i = 1; i <= reference_count; i++)
  {
    bit (1) reference_type;
    unsigned int(31) referenced_size;
    unsigned int(32) subsegment_duration;
    bit(1) starts_with_SAP;
    unsigned int(3) SAP_type;
    unsigned int(28) SAP_delta_time;
  }
}
```

The values of the fields are determined as follows:

**reference\_ID**

The track\_ID of the [\[ISOBMFF\]](#) track that contains the data of this [representation](#).

**timescale**

Same as the timescale field of the Media Header Box and same as the SegmentBase@timescale attribute in the [MPD](#).

**earliest\_presentation\_time**

The start timestamp of the first [media segment](#) on the [sample timeline](#), in [timescale units](#).

**first\_offset**

Distance from the end of the [index segment](#) to the first [media segment](#), in bytes. For example, 0 indicates that the first [media segment](#) immediately follows the [index segment](#).

**reference\_count**

Total number of [media segments](#) referenced by the [index segment](#).

**reference\_type**

0

**referenced\_size**

Size of the [media segment](#) in bytes. [Media segments](#) are assumed to be consecutive, so this is also the distance to the start of the next [media segment](#).

**subsegment\_duration**

Duration of the [media segment](#) in [timescale units](#).

**starts\_with\_SAP**

1

**SAP\_type**

Either 1 or 2, depending on the sample structure in the [media segment](#).

**SAP\_delta\_time**

0

**ISSUE 4** We need to clarify how to determine the right value for SAP\_type. [#235](#)

### 5.13.2.1. Moving the period start point (indexed addressing)§

When splitting [periods](#) in two or performing other types of editorial timing adjustments, a service might want to start a [period](#) at a point after the "natural" start point of the [representations](#) within.

For [representations](#) that use [indexed addressing](#), perform the following adjustments to set a new [period](#) start point:

1. Update SegmentBase@presentationTimeOffset to indicate the desired start point on the [sample timeline](#).
2. Update Period@duration to match the new duration.


### 5.13.3. Explicit addressing§

A representation that uses **explicit addressing** consists of a set of [media segments](#) accessed via URLs constructed using a template defined in the [MPD](#), with the exact time span covered by each [media segment](#) described in the [MPD](#).

Note: This addressing mode is sometimes called "SegmentTemplate with SegmentTimeline" in other documents.

Clauses in section only apply to [representations](#) that use [explicit addressing](#).



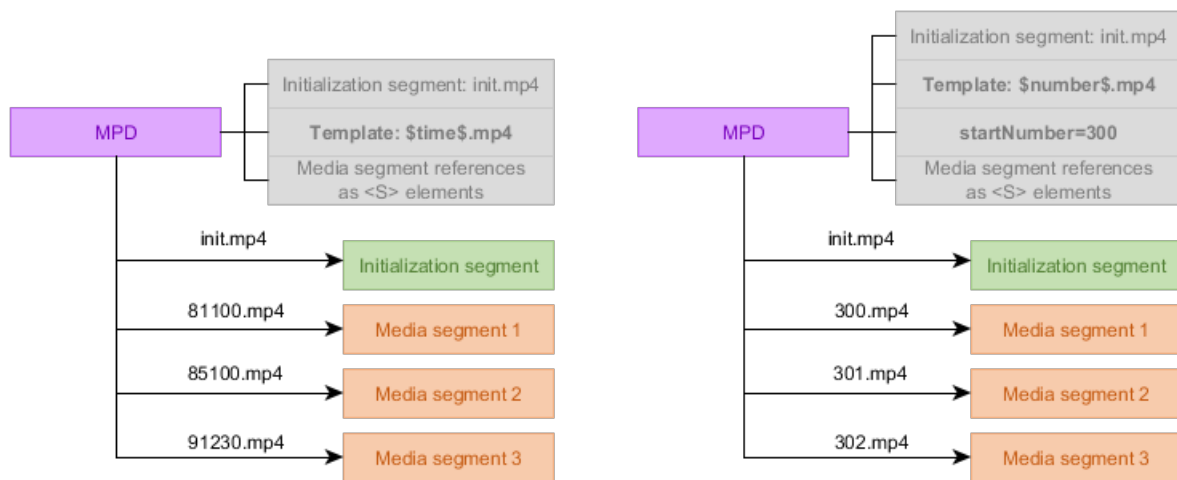

**Figure 28** *Explicit addressing* uses a segment template that is combined with explicitly defined time spans for each *media segment* in order to reference *media segments*, either by start time or by sequence number.

The **MPD** SHALL contain a `SegmentTemplate/SegmentTimeline` element, containing a set of *segment references*, which satisfies the requirements defined in this document. The *segment references* exist as a sequence of `s` elements, each of which references one or more *media segments* with start time  $S@t$  and duration  $S@d$  *timescale units* on the *sample timeline*. The `SegmentTemplate@duration` attribute SHALL NOT be present.

To enable concise *segment reference* definitions, an `s` element may represent a repeating *segment reference* that indicates a number of repeated consecutive *media segments* with the same duration. The value of  $S@r$  SHALL indicate the number of additional consecutive *media segments* that exist.

Note: Only additional *segment references* are counted, so  $S@r=5$  indicates a total of 6 consecutive *media segments* with the same duration.

The start time of a *media segment* is calculated from the start time and duration of the previous *media segment* if not specified by  $S@t$ . There SHALL NOT be any gaps or overlap between *media segments*.

The value of  $S@r$  is nonnegative, except for the last `s` element which MAY have a negative value in  $S@r$ , indicating that the repeated *segment references* continue indefinitely up to a *media segment* that either ends at or overlaps the *period* end point.

Updates to a dynamic MPD MAY add more `s` elements, remove expired `s` elements, increment `SegmentTemplate@startNumber`, add the  $S@t$  attribute to the first `s` element or increase the value of  $S@r$  on the last `s` element but SHALL NOT otherwise modify existing `s` elements.

The `SegmentTemplate@media` attribute SHALL contain the URL template for referencing *media segments*, using either the `$Time$` or `$Number$` template variable to unique identify *media segments*. The `SegmentTemplate@initialization` attribute SHALL contain the URL template for referencing *initialization segments*.

If using `$Number$` addressing, the number of the first segment reference is defined by `SegmentTemplate@startNumber` (default value 1). The  $S@n$  attribute SHALL NOT be used - segment numbers form a continuous sequence starting with `SegmentTemplate@startNumber`.

#### EXAMPLE 4

Below is an example of common usage of [explicit addressing](#).

The example defines 225 [media segments](#) starting at position 900 on the [sample timeline](#) and lasting for a total of 900.225 seconds. The [period](#) ends at 900 seconds, so the last 0.225 seconds of content is clipped (out of bounds samples may also simply be omitted from the last [media segment](#)). The [period](#) starts at position 900 which matches the start position of the first [media segment](#) found at the relative URL `video/900.m4s`.

```
<MPD xmlns="urn:mpeg:dash:schema:mpd:2011">
  <Period duration="PT900S">
    <AdaptationSet>
      <Representation>
        <SegmentTemplate timescale="1000" presentationTimeOffset="900"
          media="video/$Time$.m4s" initialization="video/init.mp4">
          <SegmentTimeline>
            <S t="900" d="4001" r="224" />
          </SegmentTimeline>
        </SegmentTemplate>
      </Representation>
    </AdaptationSet>
  </Period>
</MPD>
```

Parts of the [MPD](#) structure that are not relevant for this chapter have been omitted - this is not a fully functional [MPD](#) file.

#### EXAMPLE 5

Below is an example of [explicit addressing](#) used in a scenario where different [media segments](#) have different durations (e.g. due to encoder limitations).

The example defines a sequence of 11 [media segments](#) starting at position 120 on the [sample timeline](#) and lasting for a total of 95520 units at a [timescale](#) of 1000 units per second (which results in 95.52 seconds of data). The [period](#) starts at position 810, which is within the first [media segment](#), found at the relative URL `video/120.m4s`. The fifth [media segment](#) repeats once, resulting in a sixth [media segment](#) with the same duration.

```
<MPD xmlns="urn:mpeg:dash:schema:mpd:2011">
  <Period>
    <AdaptationSet>
      <Representation>
        <SegmentTemplate timescale="1000" presentationTimeOffset="810"
          media="video/$Time$.m4s" initialization="video/init.mp4">
          <SegmentTimeline>
            <S t="120" d="8520"/>
            <S d="8640"/>
            <S d="8600"/>
            <S d="8680"/>
            <S d="9360" r="1"/>
            <S d="8480"/>
            <S d="9080"/>
            <S d="6440"/>
            <S d="10000"/>
            <S d="8360"/>
          </SegmentTimeline>
        </SegmentTemplate>
      </Representation>
    </AdaptationSet>
  </Period>
</MPD>
```

Parts of the [MPD](#) structure that are not relevant for this chapter have been omitted - this is not a fully functional [MPD](#) file.

#### 5.13.3.1. Moving the period start point (explicit addressing)§

When splitting [periods](#) in two or performing other types of editorial timing adjustments, a service might want to start a [period](#) at a point after the "natural" start point of the [representations](#) within.

For [representations](#) that use [explicit addressing](#), perform the following adjustments to set a new [period](#) start point:

1. Update `SegmentTemplate@presentationTimeOffset` to indicate the desired start point on the [sample timeline](#).
2. Update `Period@duration` to match the new duration.
3. Remove any [unnecessary segment references](#).
4. If using the `$Number$` template variable, increment `SegmentTemplate@startNumber` by the number of [media segments](#) removed from the beginning of the [representation](#).

Note: See [§ 5.4 Representations](#) and [§ 5.9.5.2 Removing content from the MPD](#) to understand the constraints that apply to [segment reference](#) removal.

### 5.13.4. Simple addressing


**ISSUE 5** Once we have a specific `@earliestPresentationTime` proposal submitted to MPEG we need to update this section to match. See [#245](#). This is now done in [\[MPEGDASH\]](#) 4th edition - need to synchronize this text.

A representation that uses **simple addressing** consists of a set of [media segments](#) accessed via URLs constructed using a template defined in the [MPD](#), with the nominal time span covered by each [media segment](#) described in the [MPD](#).

**Simple addressing** defines the nominal time span of each [media segment](#) in the [MPD](#). The true time span covered by samples within the [media segment](#) can be slightly different than the nominal time span. See [§ 5.13.4.1 Inaccuracy in media segment timing when using simple addressing](#).

Note: This addressing mode is sometimes called "SegmentTemplate without SegmentTimeline" in other documents.

Clauses in section only apply to [representations](#) that use [simple addressing](#).

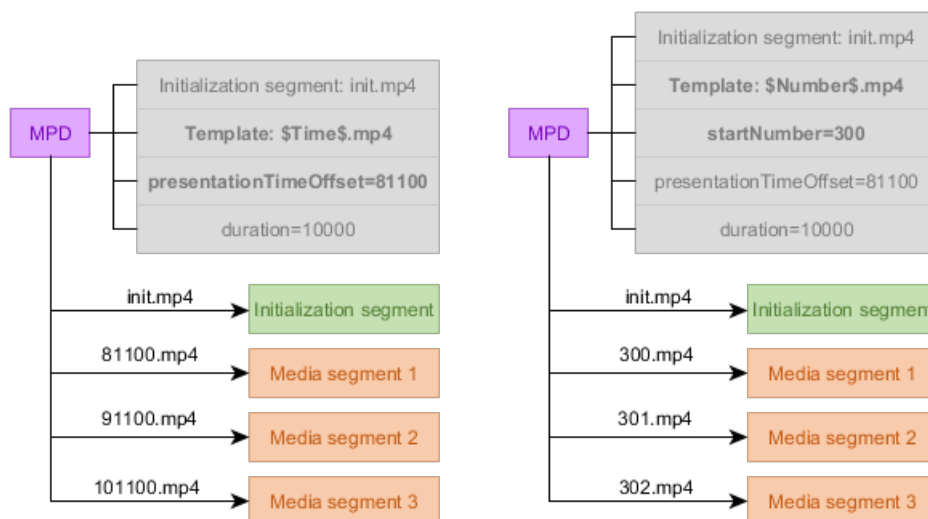

**Figure 29** *Simple addressing* uses a segment template that is combined with approximate first [media segment](#) timing information and an average [media segment](#) duration in order to reference [media segments](#), either by start time or by sequence number.

The `SegmentTemplate@duration` attribute SHALL define the nominal duration of a [media segment](#) in [timescale units](#).

The set of [segment references](#) SHALL consist of the first [media segment](#) starting exactly at the [period](#) start point and all other [media segments](#) following in a consecutive series of equal time spans of `SegmentTemplate@duration` [timescale units](#), ending with a [media segment](#) that ends at or overlaps the [period](#) end time.

The `SegmentTemplate@media` attribute SHALL contain the URL template for referencing [media segments](#), using either the `$Time$` or `$Number$` template variable to uniquely identify [media segments](#). The `SegmentTemplate@initialization` attribute SHALL contain the URL template for referencing initialization segments.

If using `$Number$` addressing, the number of the first segment reference is defined by `SegmentTemplate@startNumber` (default value 1).

## EXAMPLE 6

Below is an example of common usage of [simple addressing](#).


The example defines a [sample timeline](#) with a [timescale](#) of 1000 units per second, with the [period](#) starting at position 900. The average duration of a [media segment](#) is 4001. [Media segment](#) numbering starts at 800, so the first [media segment](#) is found at the relative URL `video/800.m4s`. The sequence of [media segments](#) continues to the end of the period, which is 900 seconds long, making for a total of 225 defined [segment references](#).

```
<MPD xmlns="urn:mpeg:dash:schema:mpd:2011">
  <Period duration="PT900S">
    <AdaptationSet>
      <Representation>
        <SegmentTemplate timescale="1000" presentationTimeOffset="900"
          media="video/$Number$.m4s" initialization="video/init.mp4"
          duration="4001" startNumber="800" />
      </Representation>
    </AdaptationSet>
  </Period>
</MPD>
```

Parts of the [MPD](#) structure that are not relevant for this chapter have been omitted - this is not a fully functional [MPD](#) file.

### 5.13.4.1. Inaccuracy in media segment timing when using simple addressing

When using [simple addressing](#), the samples contained in a [media segment](#) MAY cover a different time span on the [sample timeline](#) than what is indicated by the nominal timing in the [MPD](#), as long as no constraints defined in this document are violated by this deviation.

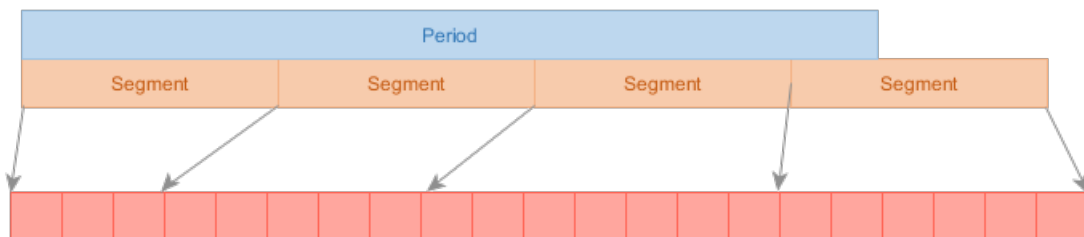

**Figure 30** [Simple addressing](#) relaxes the requirement on [media segment](#) contents matching the [sample timeline](#). Red boxes indicate samples.

The allowed deviation is defined as the maximum offset between the edges of the nominal time span (as defined by the [MPD](#)) and the edges of the true time span (as defined by the contents of the [media segment](#)). The deviation is evaluated separately for each edge.

**This allowed deviation does not relax any requirements that do not explicitly define an exception. For example, [periods](#) must still be covered with samples for their entire duration, which constrains the flexibility allowed for the first and last [media segment](#) in a [period](#).**

The deviation SHALL be no more than 50% of the nominal [media segment](#) duration and MAY be in either direction.

Note: This results in a maximum true duration of 200% (+50% outward extension on both edges) and a minimum true duration of 1 sample (-50% inward from both edges would result in 0 duration but empty [media segments](#) are not allowed).

Allowing inaccurate timing is intended to enable reasoning on the [sample timeline](#) using average values for [media segment](#) timing. If the addressing data says that a [media segment](#) contains 4 seconds of data on average, a client can predict with reasonable accuracy which samples are found in which [media segments](#), while at the same time the service is not required to publish per-segment timing data in the MPD. It is expected that the content is packaged with this constraint in mind (i.e. **every** segment cannot be inaccurate in the same direction - a shorter segment now implies a longer segment in the future to make up for it).

#### EXAMPLE 7

Consider a [media segment](#) with a nominal start time of 8 seconds from [period](#) start and a nominal duration of 4 seconds, within a [period](#) of unlimited duration.

The following are all valid contents for such a [media segment](#):

- samples from 8 to 12 seconds (perfect accuracy)
- samples from 6 to 14 seconds (maximally large segment allowed, 50% increase from both ends)
- samples from 9.9 to 10 seconds (near-minimally small segment; while we allow a 50% decrease from both ends, potentially resulting in zero duration, every segment must still contain at least one sample)
- samples from 6 to 10 seconds (maximal offset toward zero point at both ends)
- samples from 10 to 14 seconds (maximal offset away from zero point at both ends)

Near [period](#) boundaries, all the constraints of timing and addressing must still be respected! Consider a [media segment](#) with a nominal start time of 0 seconds from [period](#) start and a nominal duration of 4 seconds. If such a [media segment](#) contained samples from 1 to 5 seconds (offset of 1 second away from zero point at both ends, which is within acceptable limits) it would be non-conforming because of the requirement in [§ 5.7 Media segments](#) that the first [media segment](#) contain a media sample that starts at or overlaps the [period](#) start point. This severely limits the usefulness of [simple addressing](#).

#### 5.13.4.2. Moving the period start point (simple addressing)§

When splitting [periods](#) in two or performing other types of editorial timing adjustments, a service might want to start a [period](#) at a point after the "natural" start point of the [representations](#) within.

[Simple addressing](#) is challenging to use in such scenarios. You SHOULD convert [simple addressing representations](#) to use [explicit addressing](#) before adjusting the [period](#) start point or splitting a [period](#). See [§ 5.13.4.3 Converting simple addressing to explicit addressing](#).

The rest of this chapter provides instructions for situations where you choose **not** to convert to [explicit addressing](#).

To move the [period](#) start point, for [representations](#) that use [simple addressing](#):

- Every [simple addressing representation](#) in the [period](#) must contain a [media segment](#) that starts exactly at the new [period](#) start point.
- [Media segments](#) starting at the new [period](#) start point must contain a sample that starts at or overlaps the new [period](#) start point.

Note: If you are splitting a [period](#), also keep in mind [the requirements on period end point sample alignment](#) for the [period](#) that remains before the split point.

Finding a suitable new start point that conforms to the above requirements can be very difficult. If inaccurate timing is used, it may be altogether impossible. This is a limitation of [simple addressing](#).

Having ensured conformance to the above requirements for the new [period](#) start point, perform the following adjustments:

1. Update `SegmentTemplate@presentationTimeOffset` to indicate the desired start point on the [sample timeline](#).
2. If using the `$Number$` template variable, increment `SegmentTemplate@startNumber` by the number of [media segments](#) removed from the beginning of the [representation](#).
3. Update `Period@duration` to match the new duration.

#### 5.13.4.3. Converting simple addressing to explicit addressing

It may sometimes be desirable to convert a presentation from [simple addressing](#) to [explicit addressing](#). This chapter provides an algorithm to do this.

**[Simple addressing](#) allows for inaccuracy in [media segment](#) timing. No inaccuracy is allowed by [explicit addressing](#). The mechanism of conversion described here is only valid when there is no inaccuracy. If the nominal time spans in original the [MPD](#) differ from the true time spans of the [media segments](#), re-package the content from scratch using [explicit addressing](#) instead of converting.**

To perform the conversion, execute the following steps:

1. Calculate the number of [media segments](#) in the [representation](#) as `SegmentCount = Ceil(AsSeconds(Period@duration) / (SegmentTemplate@duration / SegmentTemplate@timescale))`.
2. Update the MPD.
  1. Add a single `SegmentTemplate/SegmentTimeline` element.
  2. Add a single `SegmentTimeline/S` element.
  3. Set `S@t` to equal `SegmentTemplate@presentationTimeOffset`.
  4. Set `S@d` to equal `SegmentTemplate@duration`.
  5. Remove `SegmentTemplate@duration`.
  6. Set `S@r` to `SegmentCount - 1`.

## EXAMPLE 8

Below is an example of a [simple addressing representation](#) before conversion.

```
<MPD xmlns="urn:mpeg:dash:schema:mpd:2011">
  <Period duration="PT900S">
    <AdaptationSet>
      <Representation>
        <SegmentTemplate timescale="1000" presentationTimeOffset="900"
          media="video/$Number$.m4s" initialization="video/init.mp4"
          duration="4001" startNumber="800" />
      </Representation>
    </AdaptationSet>
  </Period>
</MPD>
```

As part of the conversion, we calculate  $\text{SegmentCount} = \text{Ceil}(900 / (4001 / 1000)) = 225$ .

After conversion, we arrive at the following result.

```
<MPD xmlns="urn:mpeg:dash:schema:mpd:2011">
  <Period duration="PT900S">
    <AdaptationSet>
      <Representation>
        <SegmentTemplate timescale="1000" presentationTimeOffset="900"
          media="video/$Number$.m4s" initialization="video/init.mp4"
          startNumber="800">
          <SegmentTimeline>
            <S t="900" d="4001" r="224" />
          </SegmentTimeline>
        </SegmentTemplate>
      </Representation>
    </AdaptationSet>
  </Period>
</MPD>
```

Parts of the [MPD](#) structure that are not relevant for this chapter have been omitted - the above are not fully functional [MPD](#) files.

## 5.14. Large timescales and time values§

[ECMAScript](#) is unable to accurately represent numeric values greater than  $2^{53}$  using built-in types. Therefore, interoperable services cannot use such values.

All timescales are start times used in a DASH presentations SHALL be sufficiently small that no timecode value exceeding  $2^{53}$  will be encountered, even during the publishing of long-lasting live services.

Note: This may require the use of 64-bit fields, although the values must still be limited to under  $2^{53}$ .

## 5.15. Representing durations in XML§

All units expressed in [MPD](#) fields of datatype `xs:duration` SHALL be treated as fixed size:

- 60S = 1M (minute)
- 60M = 1H



- 24H = 1D
- 30D = 1M (month)
- 12M = 1Y

[MPD](#) fields having datatype `xs:duration` SHALL NOT use the year and month units and SHOULD be expressed as a count of seconds, without using any of the larger units.

## 6. Externally defined terms§

### **adaptation set**

See [\[MPEGDASH\]](#)

### **CMAF track file**

See [\[MPEGCMAF\]](#)

### **index segment**

See [\[MPEGDASH\]](#)

### **initialization segment**

See [\[MPEGDASH\]](#)

### **supplemental property descriptor**

See [\[MPEGDASH\]](#)

## Conformance§

Conformance requirements are expressed with a combination of descriptive assertions and RFC 2119 terminology. The key words “MUST”, “MUST NOT”, “REQUIRED”, “SHALL”, “SHALL NOT”, “SHOULD”, “SHOULD NOT”, “RECOMMENDED”, “MAY”, and “OPTIONAL” in the normative parts of this document are to be interpreted as described in RFC 2119. However, for readability, these words do not appear in all uppercase letters in this specification.

All of the text of this specification is normative except sections explicitly marked as non-normative, examples, and notes. [\[RFC2119\]](#)

Examples in this specification are introduced with the words “for example” or are set apart from the normative text with `class="example"`, like this:

### **EXAMPLE 9**

This is an example of an informative example.

Informative notes begin with the word “Note” and are set apart from the normative text with `class="note"`, like this:

Note, this is an informative note.

## Index§

### Terms defined by this specification§

[adaptation set](#)

[addressing modes](#)

[availability window](#)

[available](#)

[CMAF track file](#)

[dynamic MPD](#)  
[effective time shift buffer](#)  
[explicit addressing](#)  
[indexed addressing](#)  
[index segment](#)  
[initialization segment](#)  
[IOP](#)  
[Media Presentation](#)  
[media segment](#)  
[MPD](#)  
[MPD refreshes](#)  
[MPD timeline](#)  
[MPD validity duration](#)  
[period-connected](#)  
[periods](#)  
[presentation delay](#)  
[representation](#)  
[sample timeline](#)  
[segment availability times](#)  
[segment end point](#)  
[segment references](#)  
[segments](#)  
[simple addressing](#)  
[static MPD](#)  
[supplemental property descriptor](#)  
[timescale](#)  
[timescale units](#)  
[time shift](#)  
[time shift buffer](#)  
[unnecessary segment reference](#)

## References§

### Normative References§

#### [DVB-DASH]

[ETSI TS 103 285 V1.2.1 \(2018-03\): Digital Video Broadcasting \(DVB\); MPEG-DASH Profile for Transport of ISO BMFF Based DVB Services over IP Based Networks](#). March 2018. Published. URL:  
[http://www.etsi.org/deliver/etsi\\_ts/103200\\_103299/103285/01.02.01\\_60/ts\\_103285v010201p.pdf](http://www.etsi.org/deliver/etsi_ts/103200_103299/103285/01.02.01_60/ts_103285v010201p.pdf)

#### [ISOBMFF]

[Information technology — Coding of audio-visual objects — Part 12: ISO Base Media File Format](#). December 2015. International Standard. URL:  
[http://standards.iso.org/ittf/PubliclyAvailableStandards/c068960\\_ISO\\_IEC\\_14496-12\\_2015.zip](http://standards.iso.org/ittf/PubliclyAvailableStandards/c068960_ISO_IEC_14496-12_2015.zip)

#### [MPEG2TS]

Information technology — Generic coding of moving pictures and associated audio information — Part 1: Systems. June 2019. Published. URL: <https://www.iso.org/standard/75928.html>

#### [MPEGCMAF]

Information technology — Multimedia application format (MPEG-A) — Part 19: Common media application format (CMAF) for segmented media. Under development. URL: <https://www.iso.org/standard/79106.html>

#### [MPEGDASH]

Information technology — Dynamic adaptive streaming over HTTP (DASH) — Part 1: Media presentation description and segment formats. August 2019. Published. URL: <https://www.iso.org/standard/75485.html>

#### [MPEGDASHCMAFPROFILE]

N18641 WD of ISO/IEC 23009-1 4th edition AMD 1 Client event and timed metadata processing.

#### [RFC2119]

S. Bradner. [Key words for use in RFCs to Indicate Requirement Levels](#). March 1997. Best Current Practice. URL: <https://tools.ietf.org/html/rfc2119>

#### [RFC7232]

R. Fielding, Ed.; J. Reschke, Ed.. [Hypertext Transfer Protocol \(HTTP/1.1\): Conditional Requests](#). June 2014. Proposed Standard. URL: <https://httpwg.org/specs/rfc7232.html>

#### [RFC7233]

R. Fielding, Ed.; Y. Lafon, Ed.; J. Reschke, Ed.. [Hypertext Transfer Protocol \(HTTP/1.1\): Range Requests](#). June 2014. Proposed Standard. URL: <https://httpwg.org/specs/rfc7233.html>

## Informative References§

#### [ATSC3]

ATSC Standard: A/300:2017 “ATSC3.0 System”. URL: <https://www.atsc.org/wp-content/uploads/2017/10/A300-2017-ATSC-3-System-Standard-1.pdf>

#### [ECMASCRIPT]

ECMAScript Language Specification. URL: <https://tc39.es/ecma262/>

#### [ENCRYPTED-MEDIA]

David Dorwin; et al. [Encrypted Media Extensions](#). 18 September 2017. REC. URL: <https://www.w3.org/TR/encrypted-media/>

#### [MEDIA-SOURCE]

Matthew Wolenetz; et al. [Media Source Extensions™](#). 17 November 2016. REC. URL: <https://www.w3.org/TR/media-source/>

## Issues Index§

**ISSUE 1** We could benefit from some detailed examples here, especially as clock sync is such a critical element of live services. [↵](#)

**ISSUE 2** What about [period](#) connectivity? [#238](#) [↵](#)

**ISSUE 3** Update to match [\[MPEGDASH\]](#) 4th edition. [↵](#)

**ISSUE 4** We need to clarify how to determine the right value for `SAP_type`. [#235](#) [↵](#)

**ISSUE 5** Once we have a specific `@earliestPresentationTime` proposal submitted to MPEG we need to update this section to match. See [#245](#). This is now done in [\[MPEGDASH\]](#) 4th edition - need to synchronize this text. [↵](#)

